

ELECTRONIC VALVE SPECIFICATIONS
SPECIFICATION MOA/CV2162 ISSUE 2A. DATED 22nd February, 1960
AMENDMENT NO.1.

Page 2. Heater Current. (situated beneath the K1001 reference
5A3.3).

Amend the "Limits Min" Column to read "0.45" in lieu
of "0.75" quoted.

Page 4.

Cancel but do not destroy this page and substitute new
page 4 dated 1st April, 1963. attached hereto.

T.V.C. for
R.R.E.

April, 1963.
N.175391

ELECTRONIC VALVE SPECIFICATIONS
SPECIFICATION MOA/CV.2162 ISSUE 2A DATED 22nd FEBRUARY 1960
AMENDMENT No.3.

Page 3, 5A.13 Capacitances

In the column headed "LIMITS, Max." against "Cg-all",
delete "12" and substitute "15".

T.V.C. for R.R.E.

November, 1964.

NP.222419

			<u>SECURITY</u>					
			<u>Specification</u>	<u>Valve</u>				
			Unclassified	Unclassified				
→ indicates a change								
<u>TYPE OF VALVE</u> :-	Cathode Ray Tube							
<u>TYPE OF DEFLECTION</u> :-	Magnetic							
<u>TYPE OF FOCUS</u> :-	Electrostatic							
<u>BULB</u> :-	Internally coated with conductive coating.							
<u>SCREEN</u> :-	009 (Aluminium backed)							
<u>PROTOTYPE</u> :-	12L01A							
<u>MARKING</u> See K1001/4								
<u>BASE</u> B.S. 448 B 8-0								
<u>CONNECTIONS</u>								
	<u>RATING</u>	<u>Note</u>	<u>Pin</u>	<u>Electrode</u>				
Heater Voltage	(V)	4.0	1	No connection				
Heater Current	(A)	0.8	2	a1				
Max. a1 voltage	(kV)	2.2	3	a2				
Max. a3 voltage	(kV)	13.0	4	No connection				
			5	g				
			6	k				
			7	h				
			8	h				
			Side Contact	a3				
<u>TYPICAL OPERATING CONDITIONS</u>								
a1 voltage	(kV)	2.1						
a2 voltage	(kV)	1.95						
a3 voltage	(kV)	12.0						
<u>SIDE CONTACT</u>								
Max. Cg to all other electrodes	(pf)	12	B.S. 448	CT1				
Max. Co to all other electrodes	(pf)	12						
<u>DIMENSIONS</u> See drawing, page 4								
<u>NOTES</u>								
A.	Absolute maximum value.							
B.	The first anode voltage shall always be at least 50V positive with respect to the second anode voltage.							
C.	To prevent damage to the screen material the tube should be operated at its minimum useful brightness.							
D.	The fluoride screen shall not contain beryllium.							
E.	Since the screen has an aluminium backing the tube may be operated with either anode or cathode at earth potential.							

CV2162

TESTS
To be performed in addition to those applicable in K1001

TEST CONDITIONS unless otherwise specified	Vh(v)	Vg(v)	Va1(kV)	Va3(kV)	Va2	LIMITS		UNITS
	4.0	Adjust	2.1	12	Optimum focus	Min.	Max.	
5A.1 General Inspection - Dimensions	No Voltages No Voltages, See drawing on page 4	100% 100%						
5A.2 Loose Particles	No Voltages	100%						
5A.3.2 Grid Insulation Leakage Current or Increase in Voltmeter Reading	Vg = -126V Rg = 10 M. ohms	100%	Igl	-	12.6	uA	%	
5A.3.3 Heater - cathode Leakage Current Heater Current	Vhk = 150V Va1,2,3 = 0	100%	Ihk	-	150	uA		
5A.10 Negative Grid Cut-off Voltage (V1) Negative Grid Voltage (V2)	Ib = 50 uA Defocussed beam scanned or deflected off useful screen area. Note 2.	100%	Vg	70	126	V	V	
5A.7 Grid Drive (V1-V2)	Linear line scan traced in two directions at rt. angles successively. 250 mm long and 100 uS duration. Grid drive from cut-off by 100 uS pulse of amplitude V1-V2. f = 100 pps max.	100%	Vg	-	0.6	mm		
5A.12 Useful Screen Area, diameter on geometric centres	Optimum focus Ib = 50 uA	100%	Va2	1850	2050	V		
5A.11 Displacement of spot from geometric centre of screen	Vg = any convenient value	100%	-	-	10	mm		
Screen Efficiency measured in terms of beam current	Adjust Vg for a light intensity of 0.15 candela using a focussed raster of convenient size	100%	Ib	-	6	uA		
<i>Anode 2 Current for focus</i>		100%	12.2	-	6	mA		


CV2162/2A/2

TESTS (Continued)

CV2162


K1001	TEST	TEST CONDITIONS	AGL %	Insp. Level	Symbol	LIMITS		UNITS
						Min.	Max.	
5A.17	Persistence, measured as decay time to 0.014 ft. lamberts at 15°C. Note 3.	Screen to be scanned with interlaced 405 line raster of convenient size. Vg adjusted to give screen luminance of 2 ft. Lamberts. Uniform screen excitation Excitation time = 120Secs.	6.5	1B		208	-	Secs
5A.1.1	Screen Blemishes; stones, bubbles and screen defects	Scan over useful screen area with a defocussed raster of convenient brightness. Limit size No. of blemishes within any circle of 50 mm dia. No. of blemishes between 1.0 and 1.5 mm. Total No. of all blemishes Separation between blemishes				-	1.5	mm
		Ignore blemishes of less than 0.5 mm dia. Note 1.				-	5	
5A.13	Capacitances		6.5	IC	Cg-all Ck-all	-	12	pF
5A.21	Resistance to external pressure			TA		-	12	pF
<u>NOTES</u>								
1.	If two or more blemishes, including those below 0.5 mm are separated by a distance not greater than the maximum dimension of the largest blemish in the group, then the group of blemishes shall be considered as one blemish of dimension equal to the maximum overall dimension of the group.							
2.	The beam current shall increase continuously over the range of grid voltage V1 to V2.							
3.	To allow for screen temperature coefficient, the minimum decay time limit at any temperature between 15°C and 30°C which is "n" °C above 15°C is :-							
$208(1-0.04)^n$								

CV2162/24/3.

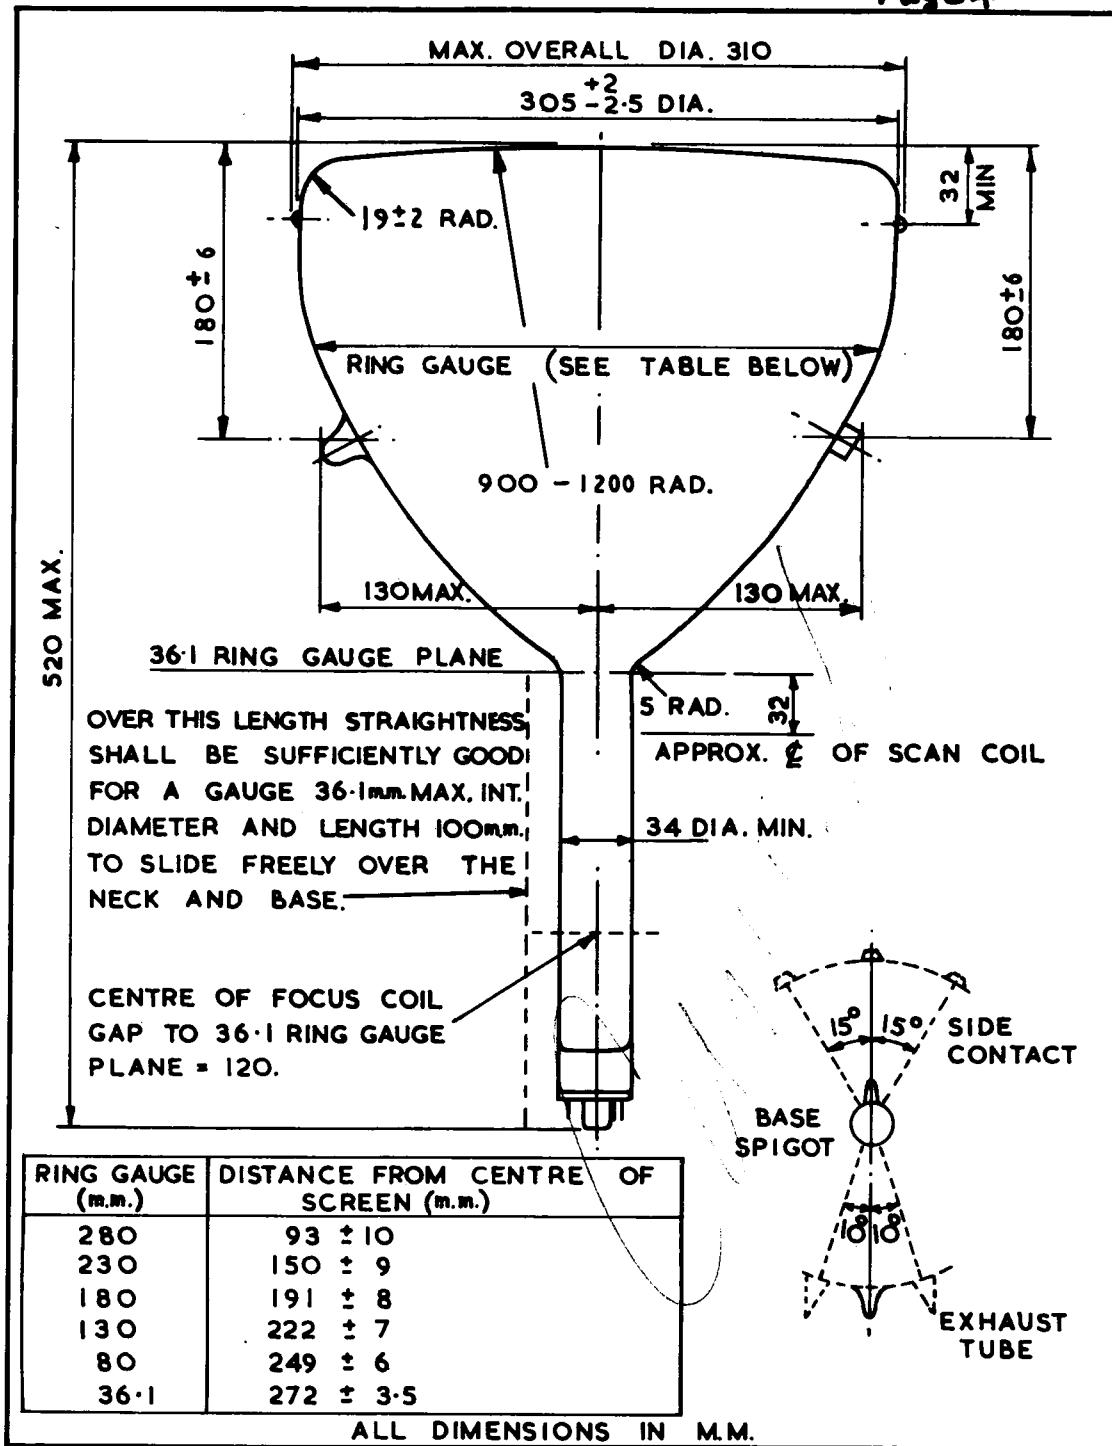

CV2162/2A/4

DIMENSIONAL OUTLINE

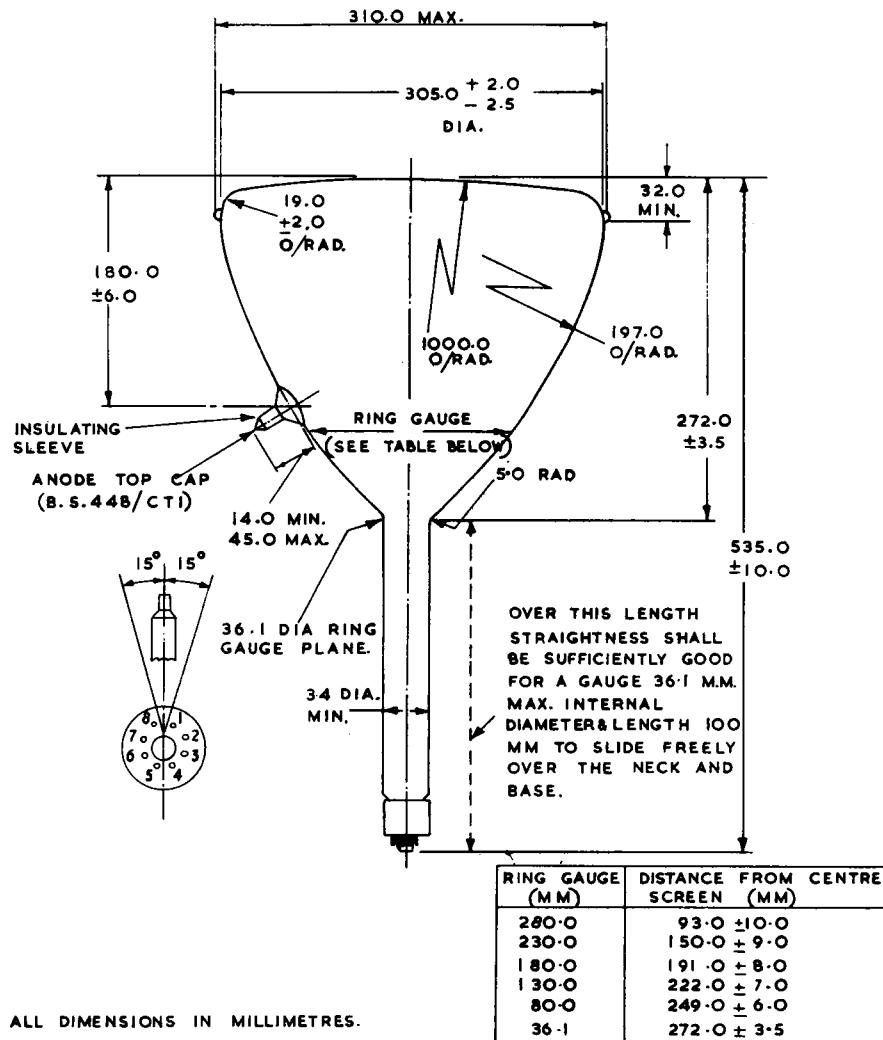

175391