



TECHNICAL DATA

**8166**  
**4-1000A**  
RADIAL-BEAM  
POWER TETRODE


The EIMAC 8166/4-1000A is a radial-beam tetrode with a maximum plate dissipation rating of 1000 watts. Intended for use as an amplifier, oscillator, or modulator, the 8166/4-1000A is capable of efficient operation well into the VHF range.

In FM broadcast service on 110 Megahertz, two 8166/4-1000A tetrodes will deliver a useful output power of over 5000 watts.

Operating under class AB<sub>2</sub> modulator conditions with less than 10 watts of peak driving power, two of these tubes will deliver 3900 watts of output power.

In class AB<sub>1</sub>, a pair of 8166/4-1000A tetrodes will deliver 3800 watts of output power.

Cooling of the tube is accomplished by radiation from the plate and by circulation of forced-air through the base and around the envelope. Cooling can be simplified through the use of the EIMAC SK-500 Air-System Socket.

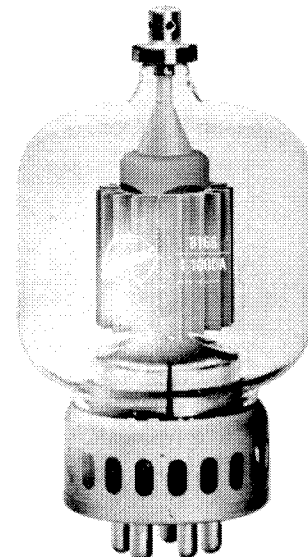

**GENERAL CHARACTERISTICS**

**ELECTRICAL**

	<i>Min.</i>	<i>Nom.</i>	<i>Max.</i>	
Filament: Thoriated tungsten				
Voltage - - - - -		7.5		volts
Current - - - - -	20.0		22.7	amperes
Amplification Factor (Grid to Screen) - - - - -	6.1		7.7	
Direct Interelectrode Capacitances:†				
Grid-Plate - - - - -			0.35	μμf
Input - - - - -	23.8		32.4	μμf
Output - - - - -	6.8		9.4	μμf
Transconductance (I <sub>b</sub> =300 ma) - - - - -		10,000		μmhos
Highest Frequency for Maximum Ratings - - - - -			110	MHz

**MECHANICAL**

Base - - - - -				5-pin metal shell
Basing - - - - -				See drawing
Recommended Socket - - - - -		EIMAC SK-500		Air-System Socket
Recommended Chimney - - - - -				SK-506
Operating Position - - - - -				Vertical, base up or down
Cooling - - - - -				Radiation and forced air
Recommended Heat-Dissipating Connector:				
Plate - - - - -				EIMAC HR-8
Maximum Over-all Dimensions:				
Length - - - - -				9.63 inches
Diameter - - - - -				5.25 inches
Net Weight (tube only) - - - - -				1.5 pounds
Shipping Weight - - - - -				12 pounds

†In Shielded Fixture



RADIO FREQUENCY POWER AMPLIFIER AND OSCILLATOR

Class-C Telephony or FM Telephony

MAXIMUM RATINGS (Key-down conditions, per tube to 110 MHz)

Table with 10 columns and 7 rows listing maximum ratings for DC Plate Voltage, DC Screen Voltage, DC Grid Voltage, DC Plate Current, Plate Dissipation, Screen Dissipation, and Grid Dissipation.

TYPICAL OPERATION (Frequencies below 110 MHz, one tube)

Table with 10 columns and 14 rows listing typical operating parameters for frequencies below 110 MHz with one tube.

\*Apparent driving power requirements increase above 30 MHz. At 110 MHz the driver should be capable of supplying 200 watts per tube to take care of feed-through, circuit losses, and radiation.

TYPICAL OPERATION (110 MHz, two tubes, push-pull)

Table with 10 columns and 14 rows listing typical operating parameters for 110 MHz with two tubes in push-pull configuration.

These 110 MHz typical performance figures were obtained by direct measurement in operating equipment. The output power is useful power measured in a load circuit. The driving power is that taken by the tube and a practical resonant circuit. In many cases with further refinement and improved techniques, better performance might be obtained.

PLATE-MODULATED RADIO-FREQUENCY AMPLIFIER

Class-C Telephony (Carrier Conditions)

MAXIMUM RATINGS (Per tube to 110 MHz)

Table with 10 columns and 7 rows listing maximum ratings for plate-modulated radio-frequency amplifier.

†5500 Max. volts below 30 MHz.

TYPICAL OPERATION (Frequencies below 110MHz, one tube)

Table with 10 columns and 16 rows listing typical operating parameters for plate-modulated radio-frequency amplifier.

\*5500 volt operation may be used below 30 MHz only.

\*\*Apparent driving power requirements increase above 30 MHz. At 110 MHz the driver should be capable of supplying 200 watts per tube to take care of feed-through, circuit losses, and radiation.

AUDIO FREQUENCY POWER AMPLIFIER AND MODULATOR

Class-AB

MAXIMUM RATINGS (Per tube)

Table with 10 columns and 5 rows listing maximum ratings for audio frequency power amplifier and modulator.

TYPICAL OPERATION Class-AB<sub>1</sub>

(Sinusoidal wave, two tubes unless otherwise specified)

Table with 10 columns and 14 rows listing typical operating parameters for Class-AB1 audio amplifier.

\*Adjust to give stated zero-signal plate current. The DC resistance in series with the control grid of each tube should not exceed 250,000 ohms.

TYPICAL OPERATION Class-AB<sub>2</sub>

(Sinusoidal wave, two tubes unless otherwise specified)

Table with 10 columns and 14 rows listing typical operating parameters for Class-AB2 audio amplifier.

\*Adjust to give stated zero-signal plate current.

Note: Typical operation data are based on conditions of adjusting the rf grid drive to a specified plate current, maintaining fixed conditions of grid bias and screen voltage. It will be found that if this procedure is followed there will be little variation in output power between tubes even though there may be some variation in grid and screen currents. Where grid bias is obtained principally by means of a grid resistor, it is necessary to make the resistor adjustable to control plate current.

IF IT IS DESIRED TO OPERATE THIS TUBE UNDER CONDITIONS WIDELY DIFFERENT FROM THOSE GIVEN UNDER "TYPICAL OPERATION," POSSIBLY EXCEEDING THE MAXIMUM RATINGS GIVEN FOR CW SERVICE, WRITE EIMAC DIVISION OF VARIAN ASSOCIATES, FOR INFORMATION AND RECOMMENDATIONS

## APPLICATION

### MECHANICAL

**Mounting** — The 4-1000A must be operated vertically. The base may be down or up. The recommended socket for this tube is the SK-500 Air-System Socket.

**Cooling** — Adequate forced-air cooling must be provided to maintain the base seal temperatures below 150°C and the plate seal temperature below 200°C. Cooling is simplified by the use of the EIMAC SK-500 Air-System Socket, and its SK-506 Air Chimney, which control the flow of air around the tube.

When the EIMAC SK-500 Air-System Socket is used, the following flow rates apply to sea level operation, with an ambient temperature of 25°C for the operating conditions described:

At 110 megahertz, with maximum rated plate dissipation, an air-flow rate of 35 cfm is required. The corresponding pressure drop as measured in the socket is 1.9 inches of water column.

At frequencies below 30 megahertz, an air-flow rate of 20 cfm provides adequate cooling. The corresponding pressure drop as measured in the socket is 0.6 inch of water column.

In the event that an Air-System Socket and Air Chimney are not used, air must be circulated through the base of the tube and over the envelope surface and the plate seal in sufficient quantities to maintain the temperatures below the maximum ratings. Seal-temperature ratings may require that cooling air be supplied to the tube if the filament is maintained at operating temperature during standby periods.

In any questionable situation, the only criterion for correct cooling practice is temperature. A convenient medium for measuring tube temperatures is a temperature-sensitive paint.

### ELECTRICAL

**Filament Voltage** — For maximum tube life the filament voltage, as measured directly at the filament pins, should be the rated voltage of 7.5 volts. Variations in filament voltage must be kept within the range of 7.13 to 7.87 volts.

**Bias Voltage** — The dc bias voltage for the 4-1000A should not exceed 500 volts. With grid-leak bias, suitable means must be provided to prevent excessive plate or screen dissipation in

the event of loss of excitation. The grid-resistor should be made adjustable to facilitate maintaining the bias voltage and plate current at the desired values from tube to tube. In the case of operation above 50 megahertz, it is advisable to keep the bias voltage as low as possible.

**Screen Voltage** — The dc screen voltage for the 4-1000A should not exceed 1000 volts. The screen voltages shown under "Typical Operation" are representative voltages for the type of operation involved.

**Plate Voltage** — The plate-supply voltage for the 4-1000A should not exceed 6000 volts in CW and audio applications. In plate-modulated telephony service above 30 megahertz, the dc plate-supply voltage should not exceed 5000 volts; however, below 30 megahertz, 5500-volts may be used.

**Grid Dissipation** — Grid dissipation for the 4-1000A should not be allowed to exceed 25 watts. Grid dissipation may be calculated from the following expression:

$$P_g = e_{\text{cmp}} I_c$$

where:  $P_g$  = Grid dissipation,  
 $e_{\text{cmp}}$  = Peak positive grid to cathode voltage  
 $I_c$  = DC grid current.

$e_{\text{cmp}}$  may be measured by means of a suitable peak voltmeter connected between filament and grid.

**Screen Dissipation** — The power dissipated by the screen of the 4-1000A must not exceed 75 watts. Screen dissipation is likely to rise to excessive values when the plate voltage, bias voltage, or plate load are removed with filament and screen voltages applied. Suitable protective means must be provided to limit screen dissipation to 75 watts in event of circuit failure.

**Plate Dissipation** — Under normal operating conditions, the plate dissipation of the 4-1000A should not be allowed to exceed 1000 watts.

In plate-modulated amplifier applications, the maximum allowable carrier-condition plate dissipation is 670 watts. The plate dissipation will rise to 1000 watts under 100 per-cent sinusoidal modulation.

Plate dissipation in excess of the maximum rating is permissible for short periods of time, such as during tuning procedures.


*Neutralization* — If reasonable precautions are taken to prevent coupling between input and output circuits, the 4-1000A may be operated up to the 10-megahertz region without neutralization. In the region between 10 megahertz and 30 megahertz, the conventional type of cross-neutralizing may be used with push-pull circuits. In single-ended circuits ordinary neutralization systems may be used which provide 180° out of phase voltage to the grid.

At frequencies above 30 megahertz the feedback is principally due to screen-lead-inductance effects. Feedback is eliminated by using series capacitance in the screen leads between the screen and ground. A variable capacitor of from 25 to 50  $\mu\mu\text{fds}$  will provide sufficient capacitance to neutralize each tube in the region of 100 megahertz. When using this method, the two screen terminals on the socket should be strapped together by the shortest possible lead. The lead from the mid-point of this screen strap



to the variable capacitor and from the variable capacitor to ground should have as little inductance as possible.

In general, plate, grid, filament, and screen-bypass or screen-neutralizing capacitors should be returned to rf ground through the shortest possible leads.

In order to take full advantage of the high power gain obtainable with the 4-1000A, care should be taken to prevent feedback from the output to input circuits. A conventional method of obtaining the necessary shielding between the grid and plate circuits is to use a suitable metal chassis with the grid circuit mounted below the deck and the plate circuit mounted above the deck. Power-supply leads entering the amplifier should be bypassed to the ground and properly shielded to avoid feedback coupling in these leads. The output circuit and antenna feeders should be arranged so as to preclude any possibility of feedback into other circuits.

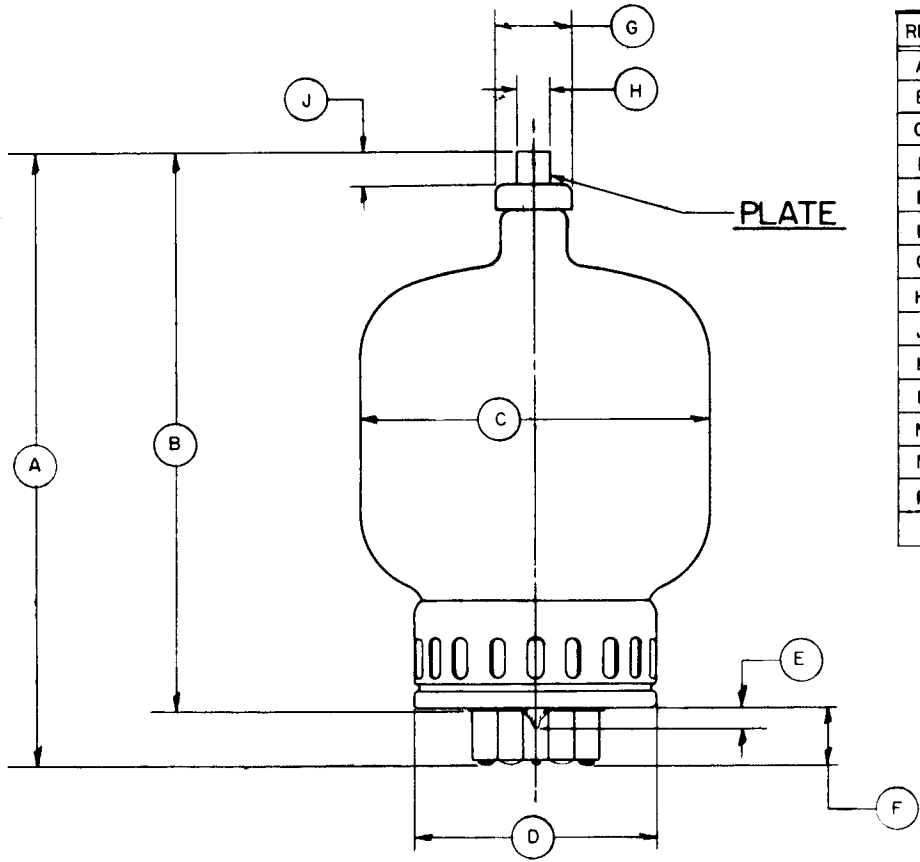

REF.	MIN.	NOM.	MAX.
A	8.875	9.250	9.625
B	8.000	8.375	8.750
C			5.250
D			3.625
E			.313
F	.825	.875	.925
G	1.110	1.125	1.140
H	.559	.566	.573
J	.484		
K		60°	
L		30°	
M		30°	
N	1.495	1.500	1.505
P	.371	.374	.377

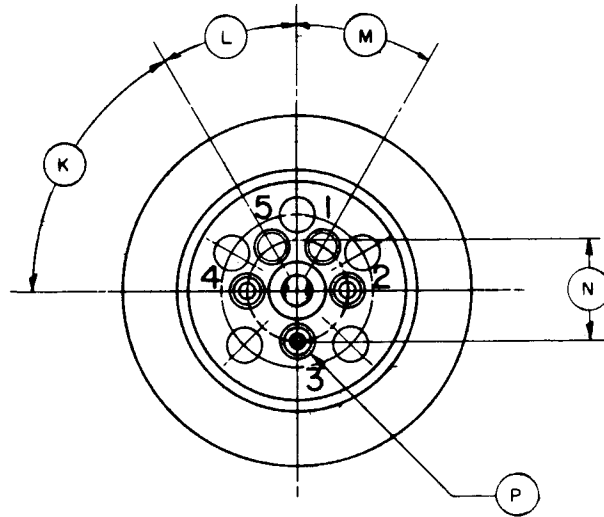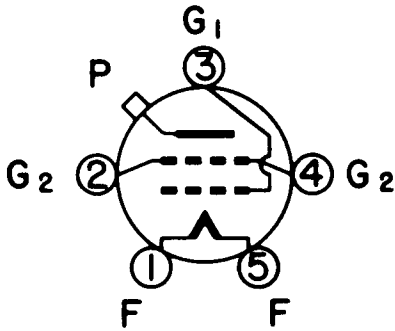

BOTTOM VIEW

DIMENSIONS  
IN INCHES

