

ELECTRONIC VALVE SPECIFICATIONS

SPECIFICATION MOS(A)/CV4061

ISSUE 2 - DATED 3RD JULY, 1958

AMENDMENT NO.1

Page 2 GROUP E

Intermittent Life Test

In column headed "INSP. LEVEL", Insert "IA"

Life Test End Point (250 hours)


In column headed "AQL %", Insert "6.5"

June 1960
N.17243 D

T.V.C. for R.R.E.

ELECTRONIC VALVE SPECIFICATION
CV4061 ISSUE2 DATED 3rd JULY 1958
AMENDMENT NO.2

PAGE3 Outline drawing. Delete existing drawing and replace with drawing below.

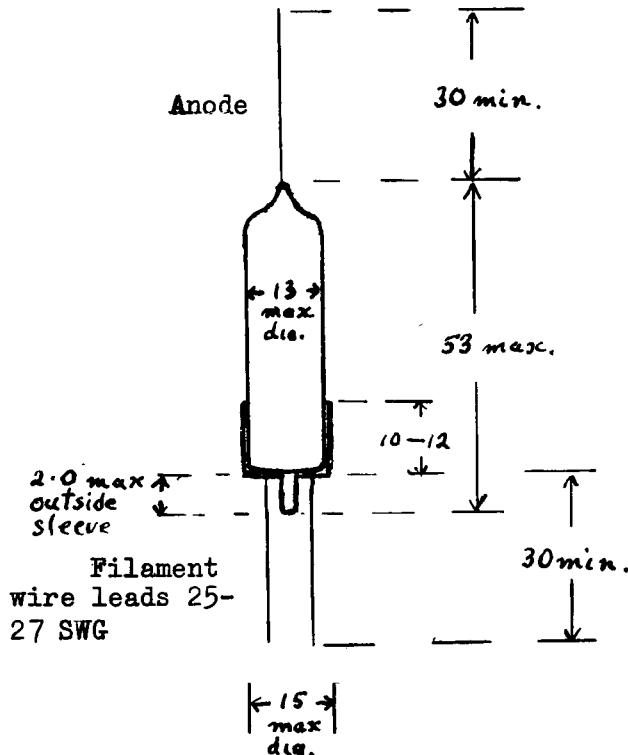

Specification MOS(A)/ CV 4061	<u>SECURITY</u>	
Issue 2 Dated 3rd July, 1958	<u>Specification</u>	<u>Valve</u>
To be read in conjunction with K1001, BS448 and BS1409	UNCLASSIFIED	UNCLASSIFIED

→ indicates a change

<u>TYPE OF VALVE</u> - Reliable High Vacuum Half-wave Rectifier with flexible leads			<u>MARKING</u>
CATHODE	- Directly-heated		
ENVELOPE	- Glass		
PROTOTYPE	- VX3159, CV. 2289.		
<u>RATING</u>			<u>BASE</u>
Filament Voltage	(V)	1.4	None
Filament Current	(A)	0.15	
Max Peak Inverse Voltage	(kV)	15	
Max Peak Inverse Voltage with direct switching	(kV)	10	
Max Peak Anode Current	(mA)	12	
Max Mean Rectified Current	(mA)	2.0	
Max Shock (short duration)	(g)	500	
Max Acceleration (continuous operation)	(g)	2.5	
<u>TYPICAL OPERATING DATA</u>			<u>CONNECTIONS</u>
Sinusoidal Input			Lead Electrode
E.M.S. Input Voltage	(kV)	5.3	
Rectified Voltage	(kV)	7.5	
Rectified Current	(mA)	100	
Reservoir Condenser (50 c/s wkg; 15% ripple)	(μF)	0.005	Top Lead Anode Bottom Leads Filaments
<u>Pulse Input</u> (see Note C)			<u>DIMENSIONS</u>
Leak Input Voltage	(kV)	7.5	See drawing on page 3
Rectified Output Voltage	(kV)	7	
Rectified Output Current	(mA)	100	
Optimum Reservoir Condenser	(μF)	0.001	Dimension (mm) Min. Max.
			Overall length - 53
			Diameter - 13
			Lead length 30
			<u>MOUNTING POSITION</u>
<u>CAPACITANCE (pF)</u>			
Ca-f (nom)		1.5	
<u>NOTES</u>			
A.	All limiting values are absolute.		
B.	This rating applies to circuits where the anode voltage rises at approximately the same rate as the filament voltage, e.g. in fly-back and RF oscillator circuits. When used in power input circuits with full AC anode voltage applied on switching, the maximum peak inverse voltage is 10 kV.		
C.	PRF = 20 kc/s; Tp = 5/u secs.		

CV4061

TESTS
To be performed in addition to those applicable in K1001

Page 2

Test Conditions - unless otherwise specified								
		Vf (V)	Va (Vdc)				LIMITS	UNITS
				AQL %	INSP. LEVEL	SYMBOL	MIN.	MAX.
K1001	TEST	TEST CONDITIONS						
7.1	Glass Strain	No voltages	6.5	I				
	<u>GROUP A</u> Voltage Breakdown	Notes 1 & 2		100%				
	<u>GROUP B</u> Filament current Anode Current (1)	Combined AQL	1.0 0.65 0.65	II II	If Ia	0.13 6.5	0.17 -	A mA
5.12	<u>GROUP C</u> Lead Fragility Anode Current (2) Capacitances	No voltages Vf=0.8V; Va=165V Measured on 1 Mc/s bridge	6.5 6.5 6.5	IA IA IC	Ia Ca-f	5.0	- 1.75	pF mA
11.3	<u>GROUP D</u> Fatigue	Combined AQL Vh = 1.4V switched 1 min on, 3 mins off; Va=0; Min pk accel = 5g; Frequency = 170 c/s; Duration = 30 + 30 + 39 hrs.	6.5	IA				
	<u>Post Fatigue Tests</u> Voltage Breakdown Filament Current Anode Current (1)	Notes 1 & 2	2.5 2.5 2.5					
11.4	Shock	No voltages; Hammer angle = 30°		IA				
	<u>Post Shock Tests</u> Voltage Breakdown Filament Current Anode Current (1)	Notes 1 & 2	2.5 2.5 2.5					
AVI/5 AVI/5.1	<u>GROUP E</u> Life Stability Life Test Change in Anode current (1)	Note 1		I				
AVI/5.3	Intermittent Life Test <u>Life Test End Point</u> (250 hrs)	Note 1 Combined AQL	1.0		Ia	-	10	%
AVI/5.6	Inoperatives Filament Anode Current (1)		2.5 2.5 2.5		If Ia	0.13 4.0	0.17 -	A mA
AIX/2.5	<u>GROUP F</u> Electrical re test after 28-day holding period.			100%				
AVI/5.6	Inoperatives		0.5					


NOTES

1. The valve shall be tested in a half-wave rectifier circuit with a 5.3 kW r.m.s. 50 c/s input voltage applied through a total external impedance of 100,000 ohms including effective transformer impedance. The load resistance shall be adjusted to give 100 μ A nom. Reservoir condenser = 0.1 μ F.

Alternatively, the test may be performed as follows :

$$\begin{aligned}
 F &= 100 \text{ kc/s approx.} \\
 R_s &= 15 \text{ M} \\
 R_L &= 80 \text{ M} \\
 C &= 0.001 \mu\text{F.} \\
 \text{P.I.V.} &= 15 \text{ kW (nominal)} \\
 I_{DC} &= 100 \mu\text{A.}
 \end{aligned}$$

2. The load conditions shall be maintained for 60 secs. There shall be no persistent sparking, blue glow or distortion of the electrodes.

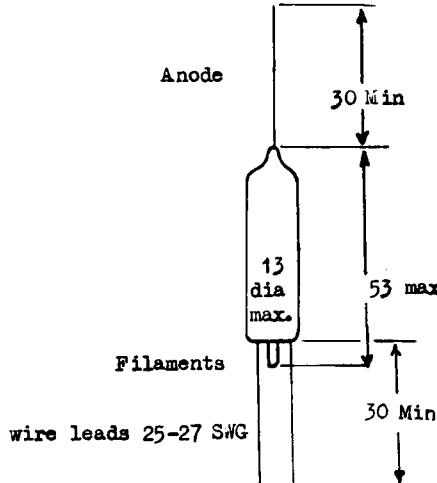Outline Drawing

All dimensions in millimetres