

Specification MDS(A)/CV1534 Issue 1 Dated 31. 3. 54. To be read in conjunction with K1001.	<u>SECURITY</u>	
	<u>Specification</u> UNCLASSIFIED	<u>Valve</u> UNCLASSIFIED

TYPE OF VALVE - Cathode Ray Tube TYPE OF DEFLECTION - Suitable for electrostatic or magnetic deflection BULB - Internally coated with conductive coating SCREEN - 009 PROTOTYPE - VCR.528			<u>MARKING</u> See K1001/4	
<u>RATING</u>			<u>CONNECTIONS</u>	
		Note	<u>Pin</u>	<u>Electrode</u>
Heater Voltage (V)	4.0		1	Cathode
Heater Current (A)	1.0		2	Grid
Max. Final Anode Voltage (kV)	7		3	Heater
Max. First Anode Voltage (kV)	2		4	Heater
X-plate sensitivity (mm/V)	1345/Va ³		5	A1
Y-plate sensitivity (mm/V)	1300/Va ³		6	A2
Desirable spot size (mm)	0.25		7	Internal conductive coating
<u>TYPICAL OPERATING CONDITIONS</u>			8	Y2
Final Anode Voltage (kV)	6		9	X2
Second Anode Voltage (kV)	1.6		10	A3
First Anode Voltage (kV)	1.8		11	X1
Beam Current (μA)	20	A	12	Y1
			<u>DIMENSIONS</u> See Drawing on Page 4	

NOTE

A. The tube is not suitable for use with a repeating line trace except at very low values of beam current, owing to extreme liability to screen burning.


To be performed in addition to those applicable in K1001

Test Conditions						Test	Limits		No. Tested	Note
							Min.	Max.		
a	See K1001/5A.13					<u>CAPACITANCES</u> (pF) 1. Each X- or Y-plate to all other electrodes. 2. Grid to all other electrodes. 3. One X to one Y-plate.	-	20	5%(10)	
	Vh	Va3 (kV)	Va2 (kV)	Val (kV)	Vg					
b	4	0	0	0	0	Ih (A)	0.8	1.3	100%	
c	4	6	Adjusted for optimum focus	1.8	Adjust to give out-off	Vg (V) Value to be noted.	-30	-100	100%	
d	4	6	ditto	1.8	-	(1) Vg (V) (2) Change in Vg from value noted in Test (c) (V)	-3	-	100%	
								40	100%	
e	4	6	ditto	1.8	-	(1) Line width (mm) (2) Va2 (V)	-	0.8	100%	1
	<p><u>DEFLECTION.</u> With a sine wave time-base of 10 kc/s nom. and a line length of 210 mm in the X and Y directions successively, the line width shall be measured at the centre of the trace.</p> <p><u>GRID.</u> The grid shall be pulsed positively with amplitude equal to the value obtained in Test (d.2), Nom Tp = 100 μsecs. Nom. PRF = 100 c/s.</p>						800	1800	100%	
f	4	6	Any convenient value	1.8	-100	<u>GRID INSULATION</u> 1. Leakage current (μ A) 2. Increase in voltmeter reading		10	100%	
	See K1001/5A.3.2. Resistor = 10 megohms							100%	100%	
g	4	6	Adjusted for optimum focus	1.8	Any convenient value	<u>DEFLECTION SENSITIVITIES</u> 1. X-plate (mm/V) 2. Y-plate (mm/V)	$\frac{1090}{Va3}$	$\frac{1660}{Va3}$	100%	
							$\frac{1000}{Va3}$	$\frac{1600}{Va3}$	100%	

Test Conditions					Test	Limits		No. Tested	Note
Vh	Va3 (kV)	Va2 (kV)	Val (kV)	Vg		Min.	Max.		
h	4	6	As for Test (g)	1.8	Any convenient value	Deviation of spot from centre of screen (mm)	-	25	100%
j	4	6	As for Test (c)	1.8	Any convenient value	USEFUL SCREEN AREA X-deflection (mm) Y-deflection (mm)	± 105 ± 105	- -	100%
Deflections measured from centre of screen.									
k	4	6	Any convenient value	1.8	As for Test (h)	Orientation of Y-axis of deflection	-	$\pm 10^\circ$	100%
Angle measured relative to axis OO' shown in Drawing on Page 4.									
m	4	6	As for Test (k)	1.8	As for Test (h)	Angle between X- and Y-axis	88°	92°	5%(10)
n	Test to be performed using Test Set Type 331, or other approved method.					Afterglow (secs)	10	20	10%


NOTE

1. Alternatively, the line width may be measured using a raster having a linear scan of 210 mm at 10 kc/s in the X direction and a 50 c/s scan in the Y direction. The Y-scan shall be expanded so that individual lines are spaced apart by at least one line width. Measurements shall be made at the centre of the screen. The grid need not be pulsed for this test but the grid voltage should be set to the value obtained in Test (d.2).



VIEW OF UNDERSIDE OF BASE.

.295 MAX.
285 MIN. DIA.

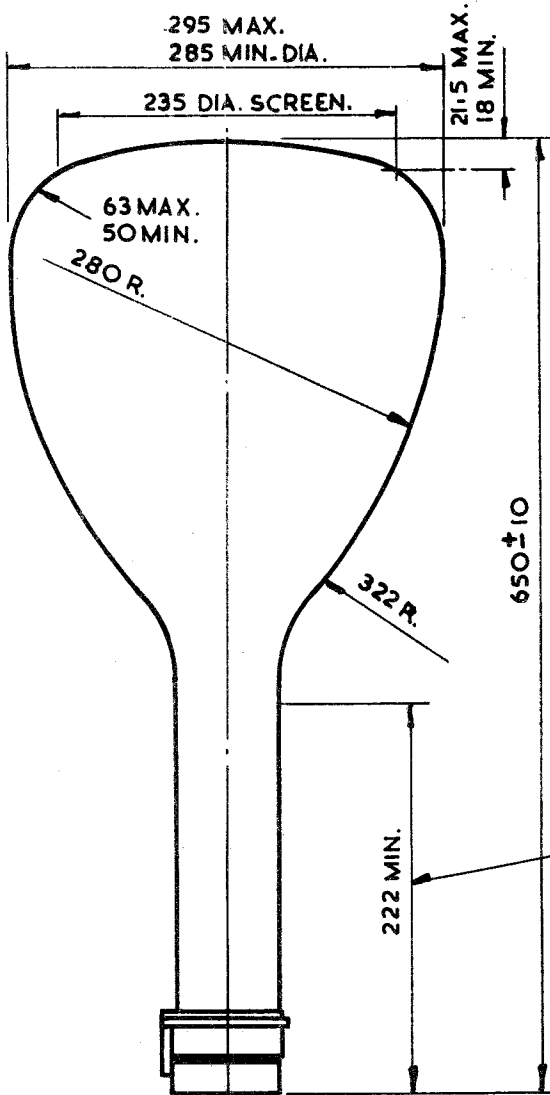

NOTES.

1. THE INTERNAL CONDUCTIVE COATING SHALL BE OF SUCH DIMENSIONS THAT IT FUNCTIONS EFFECTIVELY BUT DOES NOT OBSCURE THE REQUIRED USEFUL SCREEN AREA.
2. WHEN VIEWING THE SCREEN WITH THE TUBE POSITIONED SO THAT THE BASE SPIGOT IS UPPERMOST, A POSITIVE VOLTAGE APPLIED TO THE TERMINAL X₁ SHALL DEFLECT THE SPOT TO THE RIGHT AND A POSITIVE VOLTAGE APPLIED TO THE TERMINAL Y₁ SHALL DEFLECT THE SPOT DOWNWARDS.

73 MAX.
NECK DIA. 60 MIN. OVER
THIS LENGTH.

ALL DIMENSIONS IN MILLIMETRES.