

## R.F. DOUBLE TRIODE

Double triode with variable transconductance intended for use as V.H.F. cas-code amplifier in television receivers.

QUICK REFERENCE DATA			
Anode current	$I_a$	15	mA
Transconductance	$S$	12.5	mA/V
Amplification factor	$\mu$	31	-


**HEATING:** Indirect by A.C. or D.C.; series supply

Heater current	$I_f$	300	mA
Heater voltage	$V_f$	7.6	V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

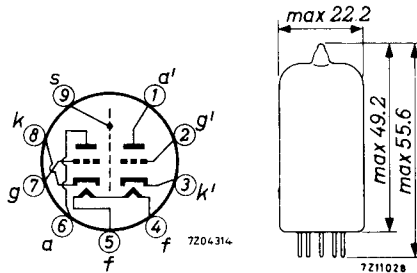

**CAPACITANCES**

		with external screen 22.2 mm diam.	without external screen
Grid to cathode + heater + screen	$C_{g/kfs}$	3.5	3.5 pF
Anode to cathode + heater + screen	$C_{a/kfs}$	2.3	1.7 pF
Anode to grid	$C_{ag}$	1.9	1.9 pF
Grid to heater	$C_{gf}$	max. 0.28	max. 0.28 pF
Cathode to grid + heater + screen	$C_{k'/g'fs}$	6.0	6.0 pF
Anode to grid, heater + screen	$C_{a'/g'fs}$	4.0	3.4 pF
Anode to cathode	$C_{a'k'}$	0.17	0.18 pF
Cathode to heater	$C_{k'f}$	2.7	2.7 pF
Anode to grid	$C_{a'g'}$	1.9	1.9 pF
Anode to anode	$C_{aa'}$	max. 0.015	max. 0.045 pF
Grid to anode other unit	$C_{ga'}$	max. 0.004	max. 0.004 pF

**TYPICAL CHARACTERISTICS** (each unit)

Anode voltage	$V_a$	90 V	
Grid voltage	$V_g$	-1.4 V	
Anode current	$I_a$	15 mA	
Transconductance	$S$	12.5 mA/V	
Internal resistance	$R_i$	2.5 k $\Omega$	
{	Grid voltage	$V_g$	-5 V
	Transconductance	$S$	0.625 mA/V
{	Grid voltage	$V_g$	-9 V
	Transconductance	$S$	0.125 mA/V

**LIMITING VALUES** (Design centre rating system) (Each unit)


Anode voltage	$V_{a_0}$	max.	550 V
	$V_a$	max.	130 V
Anode dissipation	$W_a$	max.	1.8 W
Grid voltage	$-V_g$	max.	50 V
Grid resistor			
unit a, g, k	$R_g$	max.	1 M $\Omega$
unit a', g', k'	$R_{g'}$	max.	0.5 M $\Omega$
Cathode current	$I_k$	max.	22 mA
Cathode to heater voltage			
unit a, g, k	$V_{kf}$	max.	80 V
unit a', g', k' (cathode positive)	$V_{k'f}$	max.	180 V <sup>1)</sup>



**REMARKS**


In order not to exceed the maximum permissible anode voltage when the tube is controlled, it is necessary to use a voltage divider for the grid of the grounded grid section.

The system a, g, k should be used as the grounded cathode input section and the system a', g', k' as the grounded grid output section.

<sup>1)</sup> D.C. component max. 130 V.

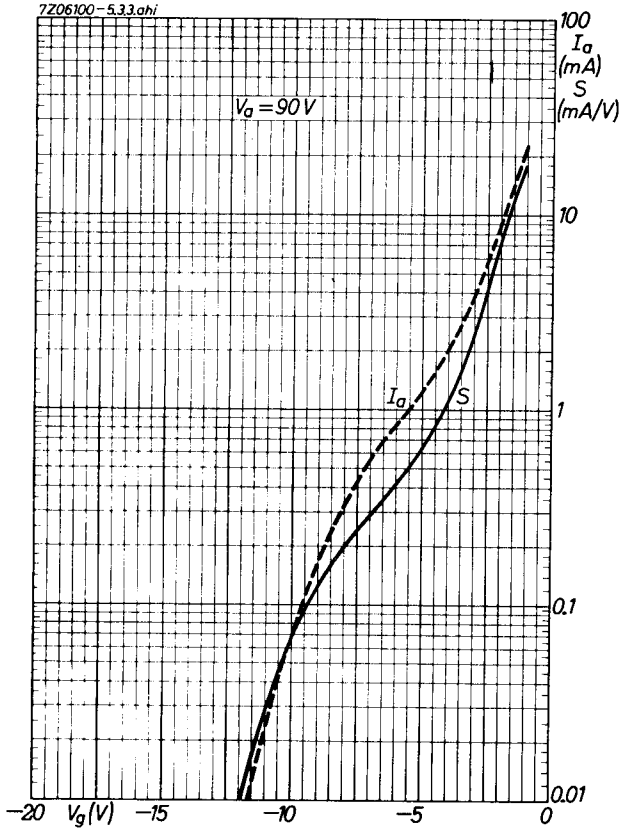

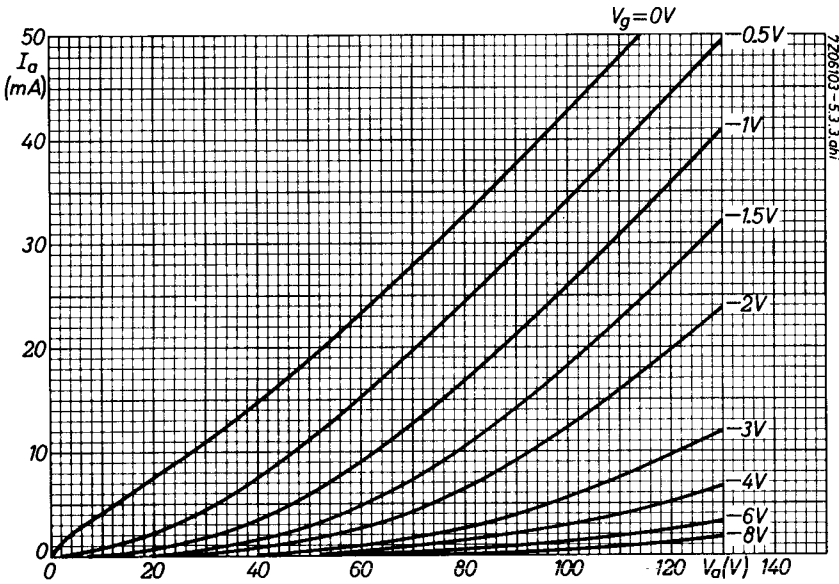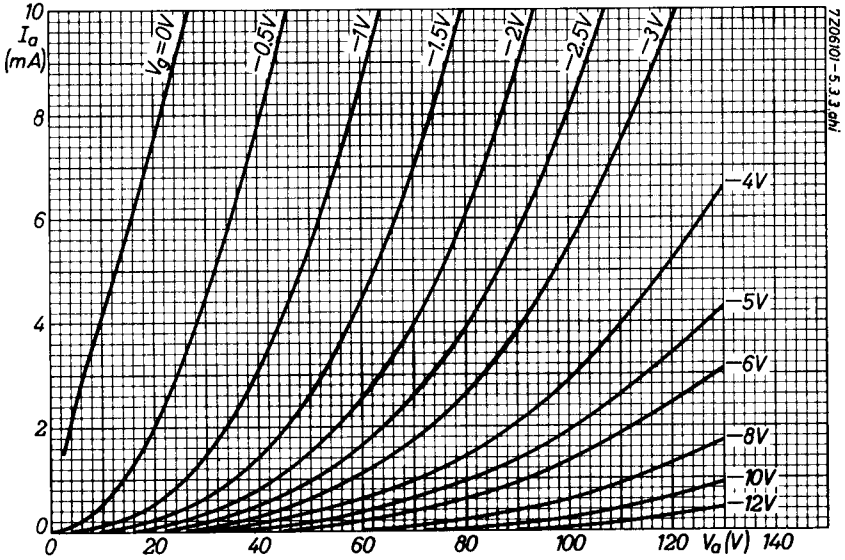

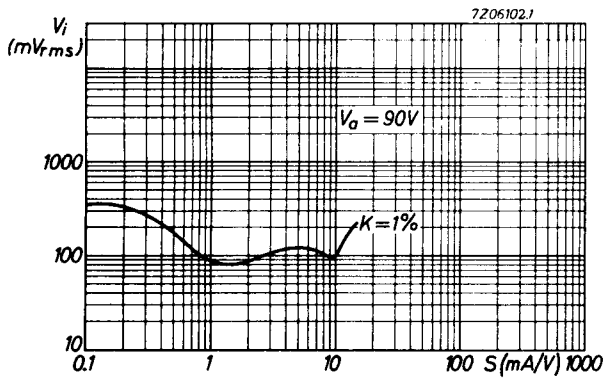

# PHILIPS

Data handbook



Electronic  
components  
and materials

## PCC189

<b>page</b>	<b>sheet</b>	<b>date</b>
1	1	1969.12
2	2	1969.12
3	3	1969.01
4	4	1969.01
5	5	1969.01
6	6	1969.12
7	FP	1999.07.31