

## AIR COOLED R.F. POWER TRIODE

Forced air cooled coaxial power triode in metal-ceramic construction primarily intended for use as R.F. class AB linear broad-band amplifier in T.V. transposer service at frequencies up to 1000 MHz.

QUICK REFERENCE DATA			
Frequency (MHz)	Transposer service (combined sound and vision)		
	V <sub>a</sub> (V)	W <sub>f</sub> (W)	Power gain (dB)
470 to 1000	1700	50	18

**HEATING:** indirect; oxide coated cathode

Heater voltage	V <sub>f</sub>	5	V ± 2%
Heater current	I <sub>f</sub>	2.1	A
Cathode heating time	T <sub>h</sub>	min. 120	s

### CAPACITANCES

Anode to grid	C <sub>ag</sub>	3.5	pF
Grid to cathode and heater	C <sub>g/kf</sub>	15	pF
Anode to cathode and heater	C <sub>a/kf</sub>	0.04	pF

### TYPICAL CHARACTERISTICS

Anode voltage	V <sub>a</sub>	1700	V
Anode current	I <sub>a</sub>	170	mA
Transconductance	S	50	mA/V
Amplification factor	$\mu$	200	

### TEMPERATURE LIMITS

Absolute max. seal temperature t max. 225 °C

Data based on pre-production tubes.

## COOLING



Forced air

$W_a$ (W)	$t_i$ (°C)	$q_{\min}$ (1 min)	$p_i$ (mm H <sub>2</sub> O)
300	20	450	26

## MECHANICAL DATA

Dimensions in mm

Net weight: approx. 180 g

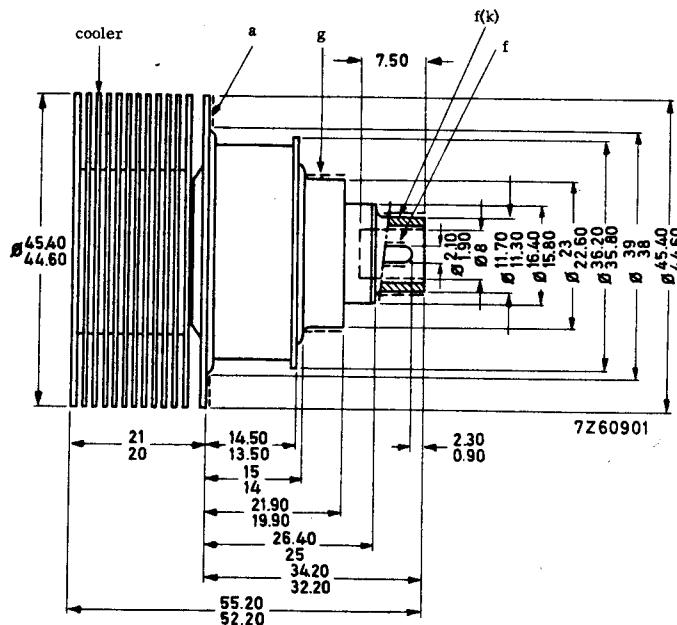

**R.F. CLASS AB AMPLIFIER FOR TELEVISION TRANSPOSER SERVICE**

Unless otherwise specified the voltages are given with respect to cathode.

**LIMITING VALUES (Absolute max. rating system)**

Frequency	f	up to	1000	MHz
Anode voltage	V <sub>a</sub>	max.	1800	V
Grid voltage	-V <sub>g</sub>	max.	5 50	V
Anode current	I <sub>a</sub>	max.	200	mA
Anode dissipation	W <sub>a</sub>	max.	300	W

**OPERATING CONDITIONS , grounded grid**

		CCIR Standard G 1)	
Frequency	f	780	MHz
Bandwidth (0 dB) (-1 dB)	B	8	MHz
	B	11	MHz
Anode voltage	V <sub>a</sub>	1700	V
Grid voltage	V <sub>g</sub>	-5	V 2)
Anode current, no-signal condition	I <sub>a</sub>	120	mA
Anode current	I <sub>a</sub>	185	mA 3)
Driving power (sync)	W <sub>dr</sub>	0.8	W
Output power in load (sync)	W <sub>l</sub>	50	W
Power gain	G	18	dB
Intermodulation products	d	-52	dB 4)

1) Negative modulation, positive synchronisation, combined sound and vision.

2) To be adjusted for the stated no-signal anode current.

3) I<sub>a</sub> at zero dB level = 50 W ( 0 dB level corresponding with peak sync ).

4) In-band intermodulation products with reference to peak sync level, measured with a three-tone test method ( vision carrier -8 dB, sound carrier -7 dB, side-band signal -17 dB with respect to the sum signal amplitude of the composite signal corresponding to zero dB level.).