

## Beam Power Tube

### GENERAL DATA

#### Electrical:

Heater, for Unipotential Cathode:

Voltage (AC or DC) . . . . .	6.3 ± 10%	volts
Current at 6.3 volts. . . . .	0.9	amp

Direct Interelectrode Capacitances (Approx.):<sup>▲</sup>

Grid-No.1 to plate. . . . .	0.6	μf
Grid-No.1 to cathode & grid No.3, grid No.2, and heater . . . . .	10	μf
Plate to cathode & grid No.3, grid No.2, and heater . . . . .	6.5	μf

#### Characteristics, Class A<sub>1</sub> Amplifier:

Plate Voltage . . . . .	250	volts
Grid-No.2 Voltage . . . . .	250	volts
Grid-No.1 Voltage . . . . .	-14	volts
Plate Resistance (Approx.). . . . .	22500	ohms
Transconductance. . . . .	6000	μmhos
Plate Current . . . . .	72	ma
Grid-No.2 Current . . . . .	5	ma

#### Mechanical:

Operating Position. . . . .	Any
Maximum Overall Length. . . . .	4-1/4"
Maximum Seated Length . . . . .	3-11/16"
Diameter. . . . .	1.438" to 1.562"
Bulb. . . . .	T-12
Base. . . . .	Medium-Shell Octal 7-Pin (JEDEC Group 1, No.B7-12), Short Medium-Shell Octal 7-Pin with External Barriers Style A (JEDEC Group 1, No.B7-111) or Style B (JEDEC Group 1, No.B7-119), or Short Medium-Shell Octal 6-Pin with External Barriers Style A (JEDEC Group 1, No.B6-148) or Style B (JEDEC Group 1, No.B6-122)
Basing Designation for BOTTOM VIEW. . . . .	7AC

- Pin 1 • - No Connection
- Pin 2 - Heater
- Pin 3 - Plate
- Pin 4 - Grid No.2



- Pin 5 - Grid No.1
- Pin 7 - Heater
- Pin 8 - Cathode, Grid No.3

### AF POWER AMPLIFIER — Class A<sub>1</sub>

Maximum Ratings, Design-Maximum Values:

PLATE VOLTAGE. . . . .	500	max.	volts
GRID-No.2 (SCREEN-GRID) VOLTAGE. . . . .	450	max.	volts
GRID-No.2 INPUT. . . . .	5	max.	watts
PLATE DISSIPATION. . . . .	30	max.	watts



# 6L6-GC

## PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode. . . . .	200	max.	volts
Heater positive with respect to cathode. . . . .	200*	max.	volts

## Typical Operation and Characteristics:

### Fixed-Bias Operation

Plate Voltage. . . . .	200	250	300	350	volts
Grid-No.2 Voltage. . . . .	200	250	200	250	volts
Grid-No.1 (Control-Grid)- Voltage. . . . .	-11.5	-14	-12.5	-18	volts
Peak AF Grid-No.1 Voltage. . . . .	11.5	14	12.5	18	volts
Zero-Signal Plate Current. . . . .	52	72	48	54	ma
Max.-Signal Plate Current. . . . .	57	79	55	66	ma
Zero-Signal Grid-No.2 Current. . . . .	3.5	5	2.5	2.5	ma
Max.-Signal Grid-No.2 Current. . . . .	5.7	7.3	4.7	7	ma
Plate Resistance (Approx.). . . . .	35000	22500	35000	33000	ohms
Transconductance . . . . .	5300	6000	5300	5200	μmhos
Load Resistance. . . . .	3000	2500	4500	4200	ohms
Total Harmonic Distortion. . . . .	9	10	11	15	%
Max.-Signal Power Output . . . . .	4	6.5	6.5	10.8	watts

### Cathode-Bias Operation

Plate Supply Voltage . . . . .	200	250	300	volts
Grid-No.2 Supply Voltage . . . . .	200	250	200	volts
Cathode Resistor . . . . .	186	167	218	ohms
Peak AF Grid-No.1 Voltage. . . . .	11.5	14	12.7	volts
Zero-Signal Plate Current. . . . .	55	75	51	ma
Max.-Signal Plate Current. . . . .	56	78	54.5	ma
Zero-Signal Grid-No.2 Current. . . . .	4.2	5.4	3	ma
Max.-Signal Grid-No.2 Current. . . . .	5.6	7.2	4.6	ma
Load Resistance. . . . .	3000	2500	4500	ohms
Total Harmonic Distortion. . . . .	9	10	11	%
Max.-Signal Power Output . . . . .	4	6.5	6.5	watts

## Maximum Circuit Values:

### Grid-No.1-Circuit Resistance:

For fixed-bias operation . . . . .	0.1	max.	megohm
For cathode-bias operation . . . . .	0.5	max.	megohm

## AF POWER AMPLIFIER — Class A<sub>1</sub>

*Triode Connection — Grid No.2 Connected to Plate*

### Maximum Ratings, Design-Maximum Values:

PLATE VOLTAGE. . . . .	450	max.	volts
PLATE DISSIPATION. . . . .	30	max.	watts
PEAK HEATER-CATHODE VOLTAGE:			
Heater negative with respect to cathode. . . . .	200	max.	volts
Heater positive with respect to cathode. . . . .	200*	max.	volts



## Typical Operation and Characteristics:

	Fixed Bias	Cathode Bias	
Plate Supply Voltage. . . . .	250	250	volts
Grid-No.1 (Control-Grid) Voltage. . .	-20	-	volts
Cathode Resistor. . . . .	-	490	ohms
Peak AF Grid-No.1 Voltage . . . . .	20	20	volts
Zero-Signal Plate Current . . . . .	40	40	ma
Maximum-Signal Plate Current. . . . .	44	42	ma
Plate Resistance (Approx.). . . . .	1700	-	ohms
Amplification Factor. . . . .	8	-	
Transconductance. . . . .	4700	-	μmhos
Load Resistance . . . . .	5000	6000	ohms
Total Harmonic Distortion . . . . .	5	6	%
Maximum-Signal Power Output . . . . .	1.4	1.3	watts

## Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

For fixed-bias operation. . . . .	0.1 max.	megohm
For cathode-bias operation. . . . .	0.5 max.	megohm

## PUSH-PULL AF POWER AMPLIFIER — Class A<sub>1</sub>

Maximum Ratings, Design-Maximum Values:

PLATE VOLTAGE. . . . .	500 max.	volts
GRID-No.2 (SCREEN-GRID) VOLTAGE. . . . .	450 max.	volts
GRID-No.2 INPUT. . . . .	5 max.	watts
PLATE DISSIPATION. . . . .	30 max.	watts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode. . .	200 max.	volts
Heater positive with respect to cathode. . .	200* max.	volts

## Typical Operation and Characteristics:

Unless otherwise specified, values are for 2 tubes

	Fixed Bias		Cathode Bias		
Plate Supply Voltage. . . . .	250	270	250	270	volts
Grid-No.2 Supply Voltage. . . . .	250	270	250	270	volts
Grid-No.1 Voltage . . . . .	-16	-17.5	-	-	volts
Cathode Resistor. . . . .	-	-	124	124	ohms
Peak AF Grid-No.1-to-					
Grid-No.1 Voltage . . . . .	32	35	35.6	28.2	volts
Zero-Signal Plate Current. . . . .	120	134	120	134	ma
Max.-Signal Plate Current . . . . .	140	155	130	145	ma
Zero-Signal Grid-No.2					
Current . . . . .	10	11	10	11	ma
Max.-Signal Grid-No.2					
Current . . . . .	16	17	15	17	ma
Plate Resistance (Approx., per tube) . . . . .					
	24500	23500	-	-	ohms
Transconductance (Per tube). . . . .					
	5500	5700	-	-	μmhos
Effective Load Resistance (Plate to plate). . . . .					
	5000	5000	5000	5000	ohms
Total Harmonic Distortion . . . . .	2	2	2	2	%
Max.-Signal Power Output. . . . .	14.5	17.5	13.8	18.5	watts



# 6L6-GC

## Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

For fixed-bias operation. . . . . 0.1 max. megohm  
 For cathode-bias operation. . . . . 0.5 max. megohm

## PUSH-PULL AF POWER AMPLIFIER — Class AB<sub>1</sub>

Maximum Ratings, Design-Maximum Values:

PLATE VOLTAGE . . . . . 500 max. volts  
 GRID-No.2 VOLTAGE . . . . . 450♦ max. volts  
 GRID-No.2 INPUT . . . . . 5 max. watts  
 PLATE DISSIPATION . . . . . 30 max. watts  
 PEAK HEATER-CATHODE VOLTAGE:  
 Heater negative with respect to cathode . 200 max. volts  
 Heater positive with respect to cathode . 200\* max. volts

## Typical Operation:

Values are for 2 tubes

	Fixed Bias			Cathode	
				Bias	
Plate Supply Voltage. . . . .	360	450	450	360	volts
Grid-No.2 Supply Voltage. . . . .	270	350	400	270	volts
Grid-No.1 (Control-Grid) Voltage♣. . . . .	-22.5	-30	-37	-	volts
Cathode Resistor. . . . .	-	-	-	248	ohms
Peak Af Grid-No.1-to- Grid-No.1 Voltage . . . . .	45	60	70	40.6	volts
Zero-Signal Plate Current. . . . .	88	95	116	88	ma
Max.-Signal Plate Current . . . . .	132	194	210	100	ma
Zero-Signal Grid-No.2 Current . . . . .	5	3.4	5.6	5	ma
Max.-Signal Grid-No.2 Current . . . . .	15	19.2	22	17	ma
Effective Load Resistance (Plate to plate). . . . .	6600	6000	5600	9000	ohms
Total Harmonic Distortion . . . . .	2	1.5	1.8	4	%
Max.-Signal Power Output. . . . .	26.5	50	55	24.5	watts

## Maximum Circuit Values:

Grid-No.1-Circuit Resistance:♣

For fixed-bias operation. . . . . 0.1 max. megohm  
 For cathode-bias operation. . . . . 0.5 max. megohm

## PUSH-PULL AF AMPLIFIER — Class AB<sub>2</sub>

Maximum Ratings, Design-Maximum Values:

PLATE VOLTAGE. . . . . 500 max. volts  
 GRID-No.2 (SCREEN-GRID) VOLTAGE. . . . . 450♦ max. volts  
 GRID-No.2 INPUT. . . . . 5 max. watts  
 PLATE DISSIPATION. . . . . 30 max. watts  
 PEAK HEATER-CATHODE VOLTAGE:  
 Heater negative with respect to cathode. . 200 max. volts  
 Heater positive with respect to cathode. . 200\* max. volts



**Typical Operation:***Values are for 2 tubes*

	Fixed Bias		
Plate Voltage. . . . .	360	360	volts
Grid-No.2 Voltage. . . . .	225	270	volts
Grid-No.1 (Control-Grid) Voltage <sup>♣</sup> . . . . .	-18	-22.5	volts
Peak AF Grid-No.1 to Grid-No.1 Voltage. . . . .	52	72	volts
Zero-Signal Plate Current. . . . .	78	88	ma
Max.-Signal Plate Current. . . . .	142	205	ma
Zero-Signal Grid-No.2 Current. . . . .	3.5	5	ma
Max.-Signal Grid-No.2 Current. . . . .	11	16	ma
Effective Load Resistance (Plate to plate). . . . .	6000	3800	ohms
Peak Grid-Input Power <sup>♣</sup> . . . . .	140	270	mw
Total Harmonic Distortion. . . . .	2	2	%
Max.-Signal Power Output . . . . .	31	47	watts

**Maximum Circuit Values:****Grid-No.1-Circuit Resistance:♣**

For fixed-bias operation . . . . .	0.1 max. megohm
For cathode-bias operation . . . . .	Not recommended

♣ Without external shield.

● On the 6-pin bases, pin 1 as well as pin 6 is omitted.

★ The dc component must not exceed 100 volts.

♦ In push-pull circuits where grid No.2 of each tube is connected to a tap on the plate winding of the output transformer, it is permissible for this voltage to be as high as 500 volts.


♣ The type of input coupling used should not introduce too much resistance in the grid-No.1 circuit. Transformer- or impedance-coupling devices are recommended.

♦ Driver stage should be capable of supplying the specified driving power at low distortion to the No.1 grids of the AB<sub>2</sub> stage. To minimize distortion, the effective resistance per grid-No.1 circuit of the AB<sub>2</sub> stage should be held at a low value. For this purpose, the use of transformer coupling is recommended.**OPERATING CONSIDERATIONS**


The *bulb* becomes hot during operation. To insure adequate cooling, therefore, it is essential that free circulation of air be provided.



# 6L6-GC

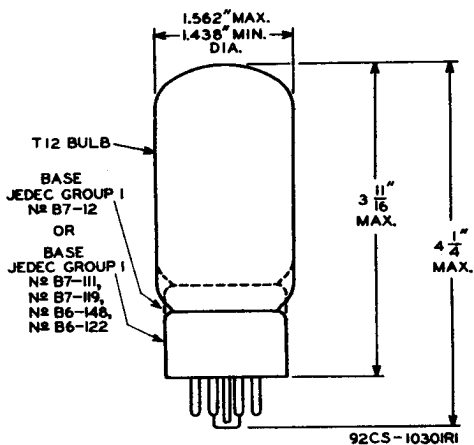

## AVERAGE PLATE CHARACTERISTICS

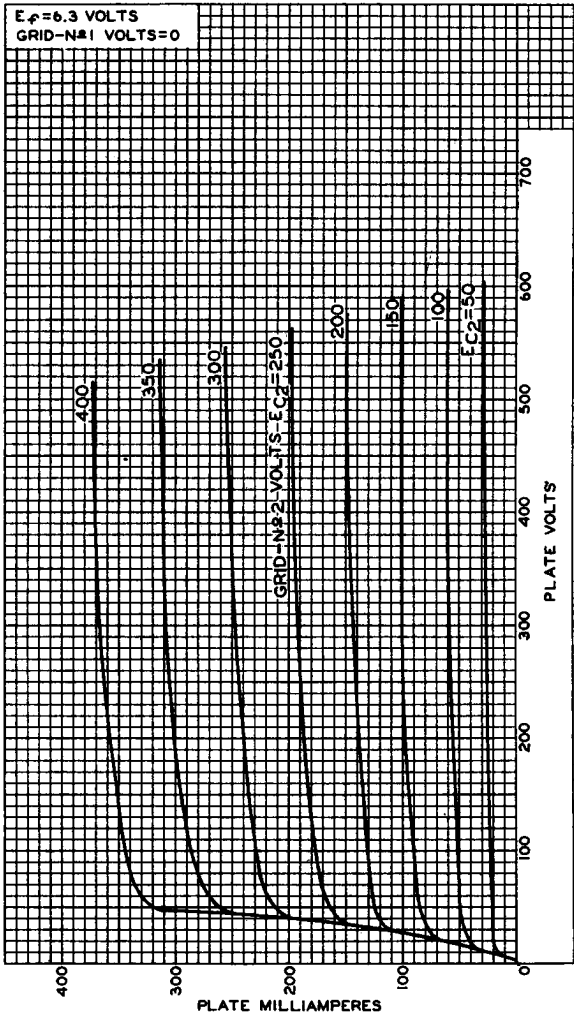


92CM-10327



# 6L6-GC

## AVERAGE CHARACTERISTICS

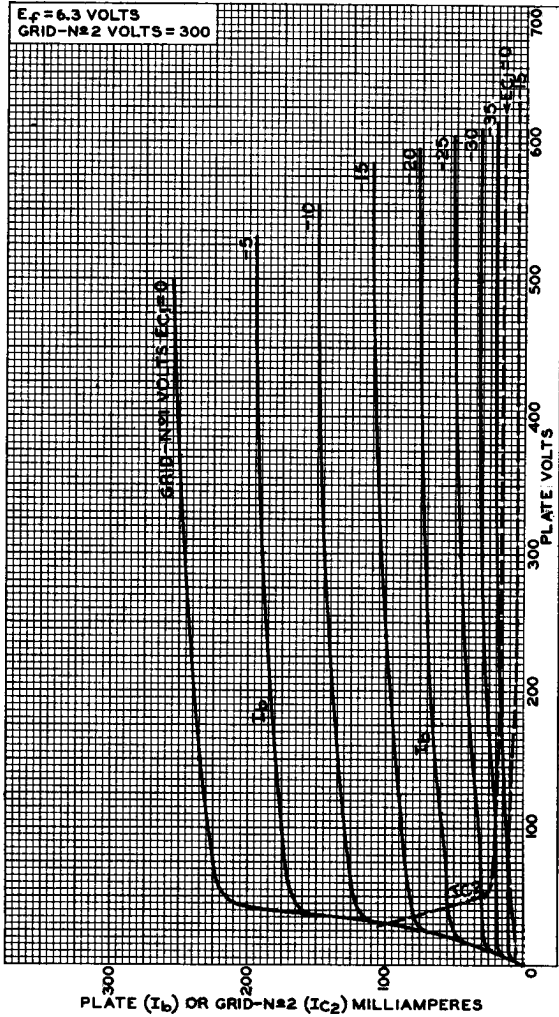


92CM-10133






## AVERAGE PLATE CHARACTERISTICS Triode Connection

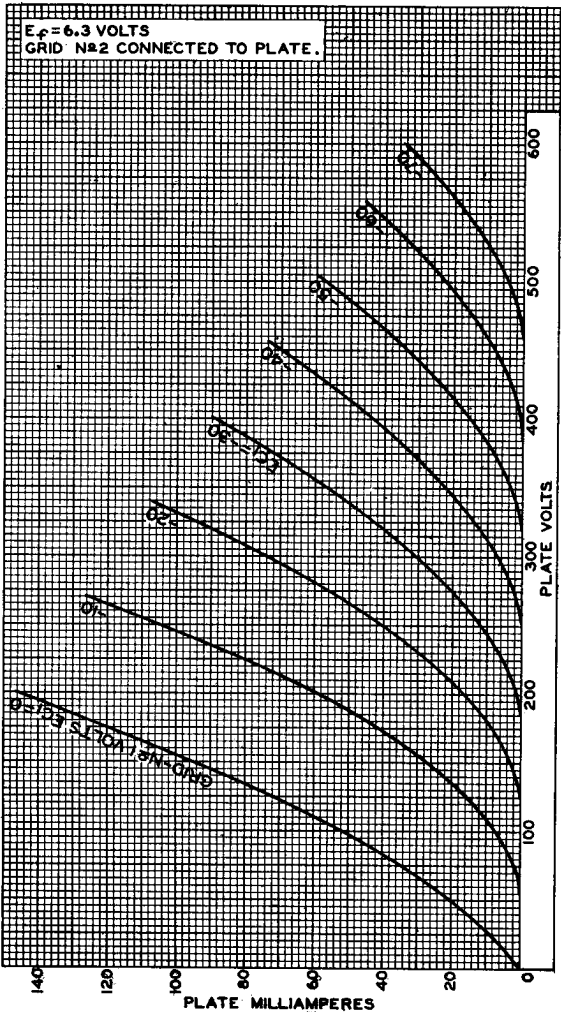

92CM-9568




## AVERAGE CHARACTERISTICS

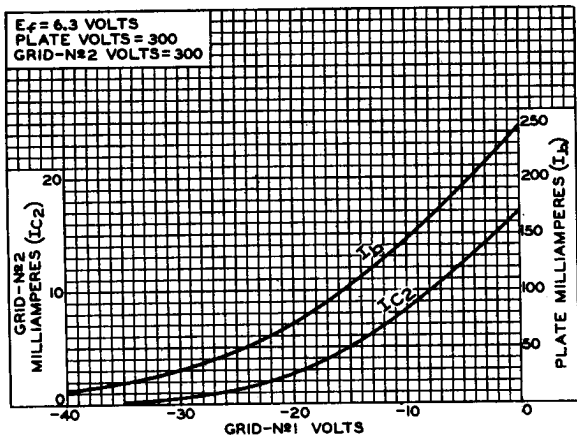

92CS-10126

## OPERATION CHARACTERISTICS Push-Pull Class AB<sub>1</sub>

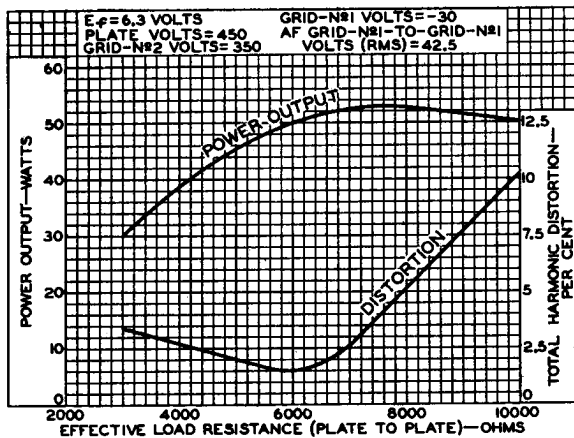

92CS-9575