

GENERAL ELECTRIC

INDUSTRIAL AND MILITARY CATHODE RAY TUBES

7BH
Page 1
5/3/61

7BH
CATHODE RAY TUBE

5-1/2 - SQUARE, GLASS	FACE PLATE - SPHERICAL, CLEAR
FOCUS - ELECTROSTATIC	SPIRAL ACCELERATOR
DEFLECTION - ELECTROSTATIC	DUAL BEAM
	ALUMINIZED

DESCRIPTION AND RATING

The General Electric Type 7BH is a 5-1/2 inch square, two beam, electrostatic deflection and focus cathode ray tube having improved deflection sensitivity and display accuracy. The deflection electrode and acceleration electrode connections are brought out through a collar base to minimize lead inductance and capacity.

The screen is aluminized for greater light output and to minimize screen charging effects.

GENERAL

ELECTRICAL*

Focusing Method - Electrostatic
Deflecting Method - Electrostatic

Direct Interelectrode Capacitances, Approx.

Cathode to All	5.0 μpf
Grid No. 1 to All.	6.0 μpf
D1 to D2.	3.0 μpf
D3 to D4.	3.0 μpf
D1 to All	10.5 μpf
D2 to All	10.5 μpf
D3 to All	10.5 μpf
D4 to All	10.5 μpf

OPTICAL

Phosphor Number	1	2	7	11
Fluorescent Color	Green	Blue-Green	Blue-White	Blue
Phosphorescent Color	-	Green	Yellow	-
Persistence	Medium	Long	Long	Short

Faceplate - Spherical, Clear

GENERAL ELECTRIC

INDUSTRIAL AND MILITARY CATHODE RAY TUBES

7ER
Page 2
5/3/61

MECHANICAL

- Over-all Length 19-5/8 ± 1/4 Inches
- Greatest Bulb Dimensions
 - Diagonal 6-29/32 Inches
 - Width and Height 5-1/2 ± 1/16 Inches
- Minimum Useful Screen Dimensions (along tube axis) 4-1/2 Inches
- Bulb Contact J1-22
- Collar A14-93
- Base B12-37
- Basing Special
- Collar and Base Alignment
 - Collar Pin No. 1 and Base Key
each aligns with the D3D4 trace ± 10 Degrees

Positive Voltage on D1 deflects the beam approximately toward Base Pin No. 4
Positive Voltage on D3 deflects the beam approximately toward Base Key

Bulb Contact Alignment:

- Bulb Contact aligns with D3D4 trace ± 10 Degrees
- Bulb Contact is on same side as the Base Key

Trace Alignment:

- D1D2 trace aligns with D3D4 trace 90 ± 1 Degrees
- Corresponding traces of each gun align within 1 Degree
- D1D2 trace aligns with bulb wall within 2 Degrees

MAXIMUM RATINGS (Absolute Maximum Values)

- Heater Voltage 6.3 Volts
- Heater Current at 6.3 Volts 0.6 ± 10% Ampere
- Post Accelerator Voltage 10,000 Max. Volts DC
- Accelerator Voltage 5,000 Max. Volts DC
- Accelerator Input 6 Max. Watts
- Ratio Post Accelerator Voltage to Accelerator
Voltage 3 Max.
- Focusing Electrode Voltage 3,000 Max. Volts DC
- Grid No. 1 Voltage
 - Negative Bias Value 200 Max. Volts DC
 - Positive Bias Value 0 Max. Volts DC
 - Positive Peak Value 0 Max. Volts

GENERAL ELECTRIC

INDUSTRIAL AND MILITARY CATHODE RAY TUBES

7BH
Page 3
5/3/61

Peak Heater to Cathode Voltage
 Heater negative with respect to cathode. 180 Max. Volts
 Heater positive with respect to cathode. 180 Max. Volts

Peak Voltage between Accelerator and any
 Deflection Electrode 750 Max. Volts

TYPICAL OPERATING CONDITIONS

Post Accelerator Voltage 7500 Volts
 Accelerator Voltage 2300 Volts
 Focusing Electrode Voltage. 460 to 775 Volts

Grid No. 1 Voltage# -45 to -80 Volts
 Modulation ##. 16 Volts Max.
 Line Width "A"###50 MM Max.

Deflection Factors:

D1 and D2 60 to 83 Volts DC/Inch
 D3 and D4 48 to 70 Volts DC/Inch

Pattern Distortion** 3% Max.
 Tracking Error#. 2% Max.
 Interaction Factor \diamond 14×10^{-6} In./Volt DC Max.
 Spot Position (Undelected) $\diamond \diamond$ Within a 10-mm square
 Focusing Electrode Current for any operating
 condition -15 to +10 Microamperes
 Anode No. 3 Current ψ 30 Max. Microamperes

MAXIMUM CIRCUIT VALUES

Grid No. 1 Circuit Resistance 1.5 Max. Megohms
 Resistance in any Deflecting-Electrode Circuit \bar{R} 1.0 Max. Megohms

NOTES

*Values are for each unit unless otherwise stated.

#Visual extinction of the focused, undeflected spot.


GENERAL ELECTRIC

INDUSTRIAL AND MILITARY CATHODE RAY TUBES


7EH
Page 4
5/3/61

- ##For a beam current of 2 μ ADC., measured in accordance with MIL-E-1 specifications.
- **The edges of a raster pattern whose mean dimensions are 75% of the useful screen width, will not deviate from the mean dimension by more than the specified amount.
- ¶When one-inch vertical (3D4) traces are superimposed at the center of the tube and deflected horizontally \pm 2 inches by voltages proportional to the relative deflection factors, horizontal separation of corresponding points on the lines shall nowhere be greater than 2% of the deflection.
- ◇The deflection of one beam when balanced DC voltages are applied to the deflection-electrodes of the other beam will not be greater than the indicated value.
- ◇◇With the free deflecting electrodes connected to the accelerator, and the tube shielded against external influences, the undeflected, focused spot will fall within a 10-mm square centered with respect to the tube face center.
- ¶¶It is recommended that the deflecting-electrode circuit resistances be approximately equal. Higher resistance values up to 5.0 megohms may be used for low beam current operation.
- ψWhen the tube is cut off (no beam current), the post accelerator anode (A₃) will draw 30 μ ADC maximum.

Electronic Components Division
Cathode Ray Tube Department
Electronics Park - Syracuse, New York

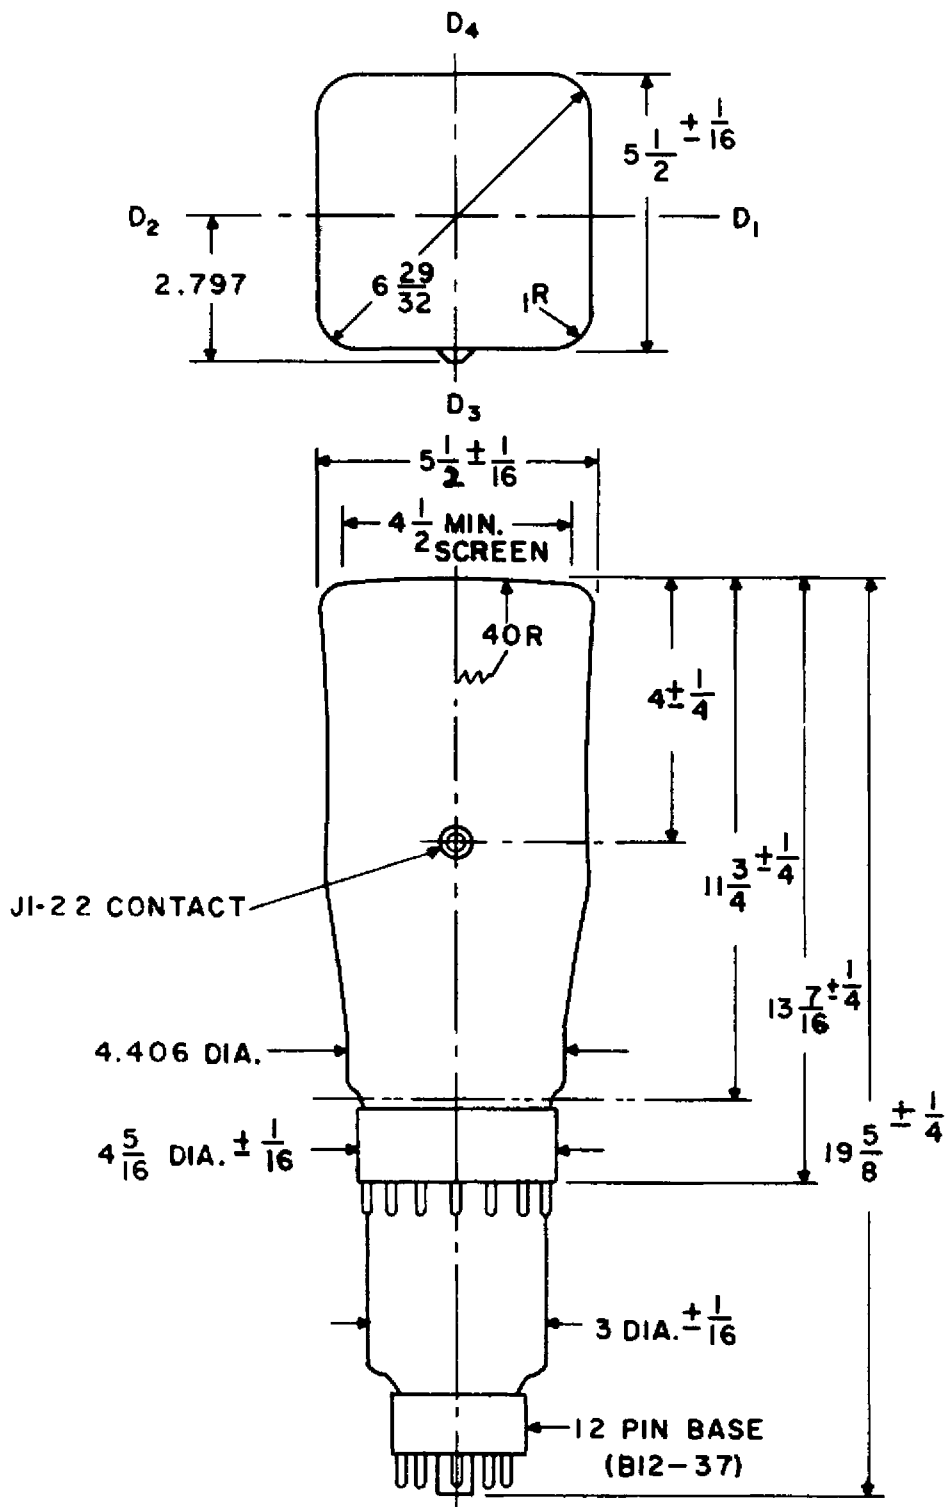


1. COLLAR PINS 4&11 (SHIELD) ARE COMMON TO BOTH BEAMS.
2. JI-22 CONTACT, COLLAR PIN 1 AND BASE KEY EACH ALIGN WITH D_3 - D_4 TRACE ± 10 .

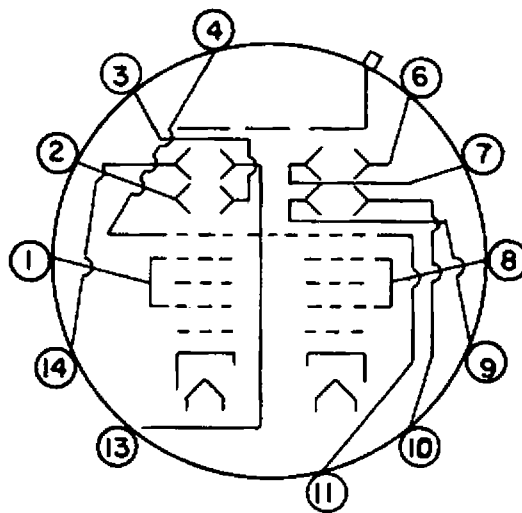

BASING DIAGRAM - COLLAR CONNECTIONS

<u>PIN.NO.</u>		<u>CONNECTION</u>	<u>PIN NO.</u>		<u>CONNECTION</u>
BEAM "A"	1.	ACCELERATOR	BEAM "B"	6	DEFLECTOR D1
	2.	DEFLECTOR D3		7	DEFLECTOR D2
	3.	DEFLECTOR D4		8	ACCELERATOR
	4.	SHIELD		9	DEFLECTOR D4
	13.	DEFLECTOR D2		10	DEFLECTOR D3
	14.	DEFLECTOR D1		11	SHIELD

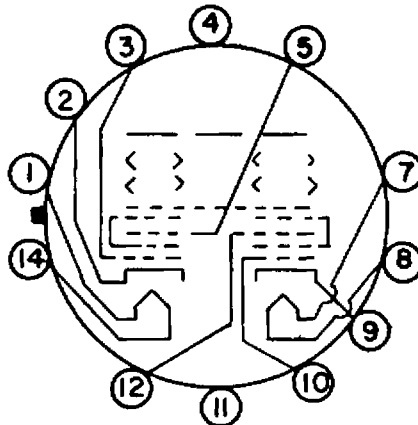

BASING DIAGRAM - BASE CONNECTIONS

<u>PIN NO.</u>		<u>CONNECTION</u>	<u>PIN NO.</u>		<u>CONNECTION</u>
BEAM A	1	HEATER	BEAM B	7	HEATER
	2	CATHODE		8	HEATER
	3	GRID NO 1		9	CATHODE
	4	INTERNAL CONNECTION		10	GRID NO 1
	5	FOCUS ELECTRODE		11	INTERNAL CONNECTION
	14	HEATER		12	FOCUS ELECTRODE