

MEDIUM-MU TWIN TRIODE

FOR "ON-OFF" CONTROL APPLICATIONS INVOLVING
LONG PERIODS OF OPERATION UNDER CUTOFF CONDITIONS

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage.	$6.3 \pm 10\%$	ac or dc volts
Current.	0.45	amp
Microphonism.	Not Tested	

Direct Interelectrode Capacitances (Approx.):^a

Each Unit:

Grid to Plate.	1.3	μuf
Grid to Cathode and Heater.	2.1	μuf
Plate to Cathode and Heater.	0.4	μuf
Grid of Unit No.1 to		
Grid of Unit No.2	0.4 max.	μuf

^a With no external shielding.


Characteristics, Class A Amplifier (Each Unit, with
both units operating):

Plate Voltage.	100	volts
Cathode-Bias Resistor*	50	ohms
Amplification Factor	39	
Plate Resistance	6500	ohms
Transconductance	6000	μmhos
Plate Current.	9.5	ma

Mechanical:

Mounting Position.	Any
Maximum Overall Length.	2-1/8"
Maximum Seated Length.	1-7/8"
Length, Base Seat to Bulb Top (Excluding tip). . .	1-1/2" \pm 3/32"
Maximum Diameter.	3/4"
Bulb.	T-5-1/2
Base.	Small-Button Miniature 7-Pin
Basing Designation for BOTTOM VIEW	7BF

Pin 1 - Plate of
 Triode No.2
Pin 2 - Plate of
 Triode No.1
Pin 3 - Heater
Pin 4 - Heater



Pin 5 - Grid of
 Triode No.1
Pin 6 - Grid of
 Triode No.2
Pin 7 - Cathode

FREQUENCY DIVIDER IN COMPUTER SERVICE & "ON-OFF" CONTROL SERVICE

Values are for each unit

Maximum Ratings, Absolute Values:

PLATE VOLTAGE. 250 max. volts

* Common to both units.

5964



5964

MEDIUM-MU TWIN TRIODE

GRID VOLTAGE:

Negative bias value.	100 max.	volts
Positive bias value.	0 max.	volts
Peak negative value.	200 max.	volts
PLATE DISSIPATION.	1.5 max.	watts
GRID INPUT	0.1 max.	watt
DC CATHODE CURRENT*.	15 max.	ma
PEAK CATHODE CURRENT*.	75 max.	ma

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode.	90 max.	volts
Heater positive with respect to cathode.	90 max.	volts
BULB TEMPERATURE (At hottest point on bulb surface)	150 max.	°C

Typical Operation as Frequency Halfer (Each Unit):

	Cutoff Condition	Zero-Bias Condition	
Plate-Supply Voltage	150	150	volts
Plate-Circuit Resistance	20000	20000	ohms
Grid-Supply Voltage.	-10	0	volts
Grid-Circuit Resistance.	47000	47000	ohms
Plate Current.	0	5	ma

Maximum Circuit Values:

Grid-Circuit Resistance:

For fixed-bias operation	0.5 max.	megohm
For cathode-bias operation	1.0 max.	megohm

RANGE VALUES FOR EQUIPMENT DESIGN

Cutoff Condition	Note	Min.	Max.	
Plate Current (Each Unit). 1		-	0.2	ma
Difference in Plate Current Between Units. . -		-	0.2	ma
Zero-Bias Condition				
Plate Current (Each Unit). 2		4.3	5.7	ma
Difference in Plate Current Between Units. . -		-	1.4	ma

Note 1: For conditions with 6.3 volts on heater, plate-supply volts = 150, plate-circuit resistance (ohms) = 20000, grid-supply volts = -10, and grid-circuit resistance (ohms) = 47000.


Note 2: Conditions are same as for Note 1 except that grid-supply volts = 0.

* With both units operating, the dc cathode current should not exceed 30 milliamperes, and the peak cathode current should not exceed 150 milliamperes.



5964

5964

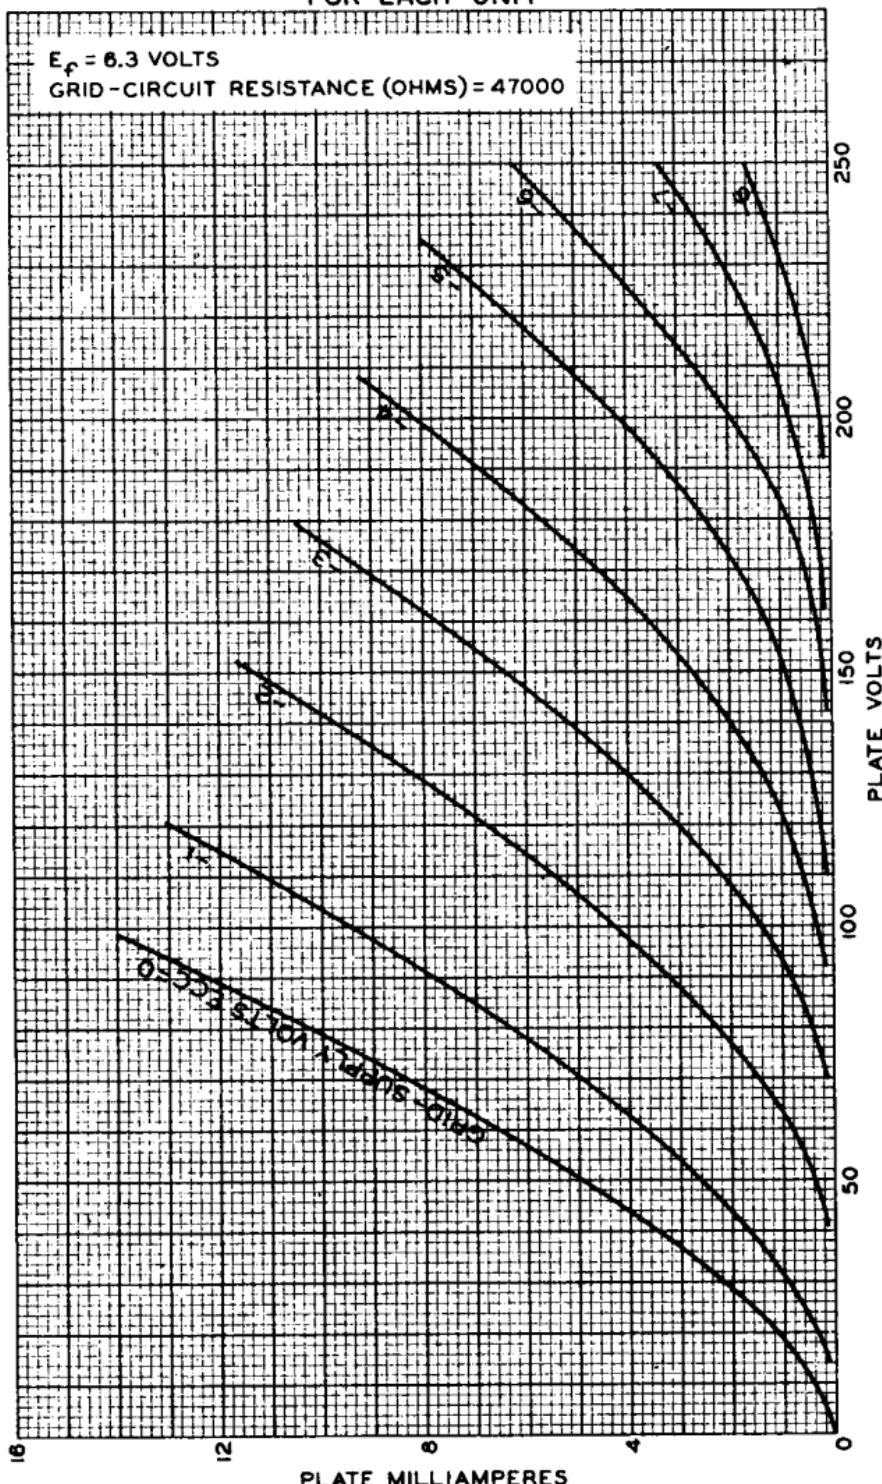AVERAGE OPERATION CHARACTERISTICS
FOR EACH UNIT

MAY 31, 1950

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM - 7495