

TUNG-SOL

CATHODE RAY

THE 17RP4 AND 17RP4C ARE DIRECT VIEW PICTURE TUBES DESIGNED FOR USE IN TELEVISION APPLICATIONS. THEY ARE IDENTICAL *EXCEPT* FOR THE ALUMINIZED SCREEN ON THE 17RP4C. THEIR COMMON FEATURES INCLUDE.

ELECTROSTATIC FOCUS	MAGNETIC DEFLECTION
UNIPOTENTIAL CATHODE	GREY FILTER FACEPLATE
EXTERNAL CONDUCTIVE COATING	14 1/4" X 10 3/4" RASTER SIZE
RECTANGULAR GLASS CONSTRUCTION	EXTERNAL SINGLE FIELD ION TRAP

ELECTRICAL DATA

		ELECTROSTATIC MAGNETIC
FOCUSING METHOD		
DEFLECTING METHOD		
DEFLECTION ANGLE (APPROX.)		
HORIZONTAL	66	DEGREES
DIAGONAL	70	DEGREES
DIRECT INTERELECTRODE CAPACITANCES (APPROX.)		
CATHODE TO ALL OTHER ELECTRODES	5	μf
GRID #1 TO ALL OTHER ELECTRODES	6	μf
MAXIMUM EXTERNAL CONDUCTIVE COATING TO ANODE	1 500	μf
MINIMUM EXTERNAL CONDUCTIVE COATING TO ANODE	750	μf

OPTICAL DATA

PHOSPHOR NUMBER		NO. 4
FLUORESCENT COLOR		WHITE
PHOSPHORESCENT COLOR		WHITE
PERSISTENCE		MEDIUM
FACEPLATE LIGHT TRANSMISSION AT CENTER (APPROX.)	66	PERCENT

RATINGS

DESIGN CENTER VALUES

HEATER VOLTAGE	6.3	VOLTS
HEATER CURRENT	0.6	AMP.
MAXIMUM DC ANODE, GRID #3 VOLTAGE	16 000	VOLTS
MAXIMUM DC ANODE #1 VOLTAGE	-500 TO +1000 ←	VOLTS
MAXIMUM DC GRID #2 VOLTAGE	500	VOLTS
MAXIMUM GRID #1 VOLTAGE		
DC NEGATIVE-BIAS VALUE	125	VOLTS
DC POSITIVE-BIAS VALUE	0	VOLTS
POSITIVE-PEAK VALUE	2	VOLTS
MAXIMUM DC PEAK HEATER-CATHODE VOLTAGE		
HEATER NEGATIVE WITH RESPECT TO CATHODE		
DURING WARM-UP PERIOD NOT TO EXCEED 15 SECONDS	410	VOLTS
AFTER EQUIPMENT WARM-UP PERIOD	180	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE	180	VOLTS
MAXIMUM GRID #1 CIRCUIT RESISTANCE	1.5	MEG OHMS

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

DC ANODE, GRID #3 VOLTAGE	12 000	VOLTS
DC ANODE #1 VOLTAGE (FOCUSING ELECTRODE) ^A	0	VOLTS
DC GRID #2 VOLTAGE	300	VOLTS
DC GRID #1 VOLTAGE ^B	-33 TO -77	VOLTS
DC ION TRAP CURRENT STANDARD COIL #111 (APPROX.)	75 ± 50%	MA.

^A THE FOCUS ELECTRODE MAY BE MODULATED FOR IMPROVED OVERALL FOCUS.

^B VISUAL EXTINCTION OF UNDEFLECTED FOCUSED SPOT.

→ INDICATES A CHANGE.


CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE


MECHANICAL DATA

OVERALL LENGTH	19 1/4 ± 3/8	INCHES
GREATEST DIMENSIONS OF BULB		
DIAGONAL	16 5/8 ± 1/8	INCHES
WIDTH	15 3/8 ± 1/8	INCHES
HEIGHT	12 1/4 ± 1/8	INCHES
MINIMUM USEFUL SCREEN DIMENSIONS		
DIAGONAL	15 1/2	INCHES
WIDTH	14 1/4	INCHES
HEIGHT	10 3/4	INCHES
BULB CONTACT	RECESSED SMALL CAVITY CAP	J1-21
BASE	SMALL SHELL DUODECAL 6 PIN	B6-63
BASING		12L
BULB CONTACT ALIGNMENT		
	J1-21 CONTACT ALIGNS WITH PIN POSITION #6 ± 30 DEGREES	

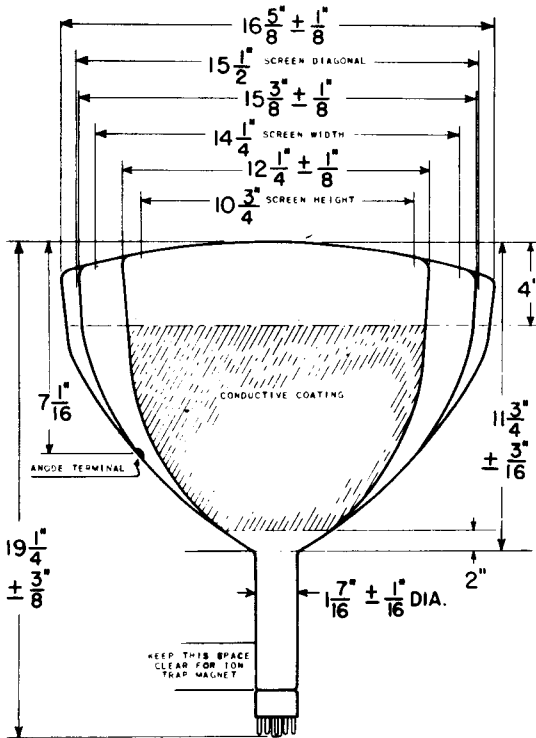

PIN CONNECTIONS

- PIN 1 - HEATER
- PIN 2 - GRID NO. 1
- PIN 6 - GRID NO. 4
- PIN 10 - GRID NO. 2



- PIN 11 - CATHODE
- PIN 12 - HEATER
- ANODE CAP:
- GRID NO. 3

BOTTOM VIEW