



T.			$U_f$	$I_f$	$U_{tr}$	$U_p$	$I_o$	$I_p$	$f_{tr}$	$R_{tr}$	$C_F$	$C_{d/k}$	
			V	A	V	V	mA	mA	Hz	k $\Omega$	$\mu$ F	pF	
EY 1	eur	1	6,3	0,08	5000		3	18	50	100	0,1		
EY 51	eur	3	<sup>1)</sup> 0,09	0,09		17000	0,5	4	10 000 ÷ 500 000			<sup>2)</sup>	
U 45 <sup>2)</sup>	Marc	3	6,3	0,12		17000	0,35	80			impulse <sup>3)</sup>	0,005	0,8
EY 86	eur	2	<sup>1)</sup>	0,09	5000		3		50	100	0,2		
					18000		0,15		50				
						22000	0,8		impulse <sup>6)</sup>		0,002	1,8	
					27000		40	impulse <sup>7)</sup>					


T.	Image 1	Image 2	$U_f$	$I_f$	$U_{tr}$	$U_p$	$I_o$	$I_p$	$f_{tr}$	$R_{tr}$	$C_F$	$C_{o/k}$
			V	A	V	V	mA	mA	Hz	k $\Omega$	$\mu$ F	pF
R 12	Bri	3	$6,3 \pm 10\%$	0,09	5000	17000	0,5	11	50	100	0,1	0,55
6 AX 2	amer	2	6,3	0,1		17000	0,1		10000 ÷ 500000	impulse <sup>3)</sup>	100	
6 W 2	amer	3	6,3	0,08	9000	25000	0,3	5	50			

1)  $I_o \leq 0,2$  mA  $U_f = 5,35 \div 7,25$  V  
 $I_o > 0,2$  mA  $U_f = 5,96 \div 6,74$  V  
 2)  $U_p = 18000$  V  
 3)  $C_F = \frac{5}{Hz} \mu F$


4)  $U_{tr} = 6000$  V  
 5) Fig. 1:  $t_1 \leq 0,5\%$   $t_2 \leq 5 \mu sec$   
 6) Fig. 1:  $t_1 \leq 18\%$   $t_2 \leq 18 \mu sec$   
 7) Fig. 1:  $t_1 \leq 10\%$   $t_2 \leq 10 \mu sec$   
 8) Fig. 1:  $t_1 \leq 15\%$   $t_2 \leq 10 \mu sec$

Equivalents


EY 87	Phi = EY 86	U 151 <sup>4)</sup>	Marc = EY 51	6 S 2 A	amer = EY 86
SU 61	Cos = R 12	6 AX 2 N	RB = 6 AX 2	6 X 2	amer = EY 51
U 43	Marc = EY 51	6 S 2	amer = EY 86	90 V 9	Fot = EY 1



EY1



EY86

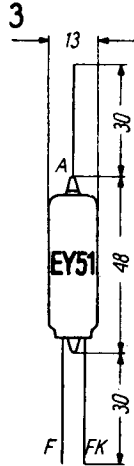

EY51



EY86 6AX2



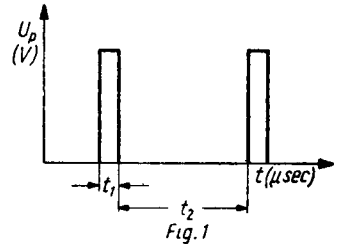



Fig. 1

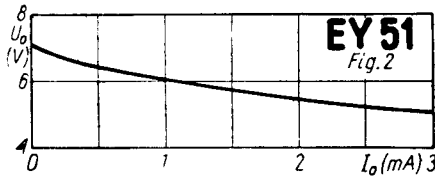


EY51 Fig. 2

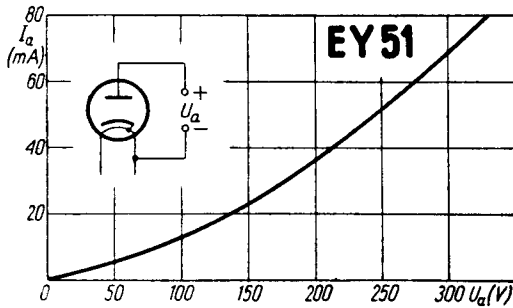


EY51

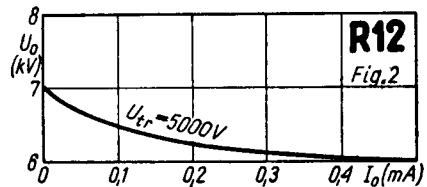

R12 Fig. 2

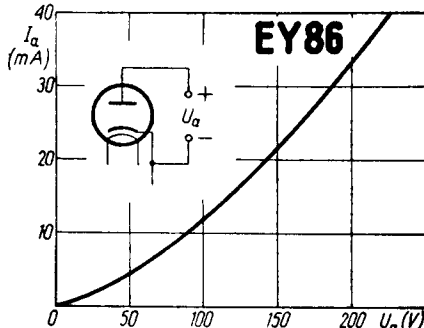

EY86

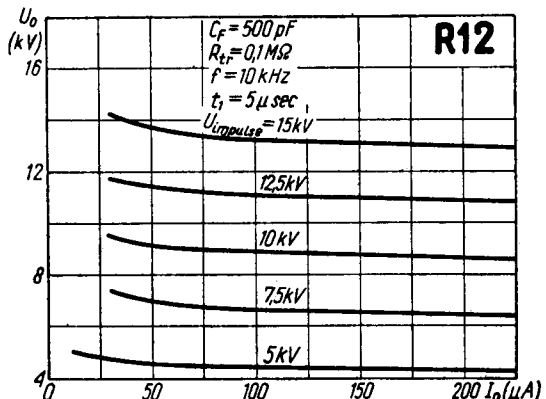

R12