


**TUNG-SOL**


PENTODE

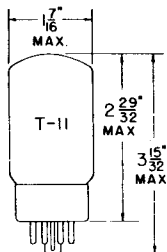

GLASS BULB

COATED UNIPOTENTIAL CATHODE

HEATER  
6.3 VOLTS 0.9 AMP.  
AC OR DC  
ANY MOUNTING POSITION



**BOTTOM VIEW**  
SHORT INTERMEDIATE  
SHELL 7 PIN  
LOW LOSS PHENOLIC

75

THE 6L6WGB IS A RUGGEDIZED BEAM PENTODE OF THE SINGLE ENDED CONSTRUCTION USED PRIMARILY IN AUDIO POWER OUTPUT STAGES. IT IS ELECTRICALLY EQUIVALENT TO TYPES 6L6 AND 6L6G, EXCEPT THAT PLATE AND SCREEN DISSIPATIONS HAVE BEEN INCREASED APPROXIMATELY 20%. THE USE OF SPECIALLY COATED GRIDS AND ANODES GREATLY INCREASES ITS ABILITY TO WITHSTAND OVERLOAD CONDITIONS FOR SHORT PERIODS OF TIME AND PROVIDES IMPROVEMENT IN CONTINUITY OF SERVICE. THE 6L6WGB EMPLOYS A MICANOL BARRIER BASE WHICH ABSORBS LESS MOISTURE AND REDUCES THE CHANCE OF VOLTAGE BREAKDOWN BETWEEN ADJACENT PINS. SINCE THIS TUBE MUST BE ABLE TO WITHSTAND SEVERE MECHANICAL TESTS TO MEET TEST SPECIFICATIONS, THE 6L6WGB IS ESPECIALLY SUITED FOR USE IN INDUSTRIAL AND MILITARY EQUIPMENT WHICH MAY BE SUBJECTED TO SEVERE SHOCK AND VIBRATION, SUCH AS AIRBORNE EQUIPMENT.

**DIRECT INTERELECTRODE CAPACITANCES**

	WITHOUT SHIELD	
GRID TO PLATE (RATED)	0.9	$\mu f$
INPUT (RATED)	11.5	$\mu f$
OUTPUT (RATED)	9.5	$\mu f$

**RATINGS**

ABSOLUTE MAXIMUM VALUES

HEATER VOLTAGE	6.3 $\pm$ 10%	VOLTS
MAXIMUM DC PLATE VOLTAGE	400	VOLTS
MAXIMUM DC GRID #2 VOLTAGE	300	VOLTS
MAXIMUM PLATE DISSIPATION	26	WATTS
MAXIMUM GRID #2 DISSIPATION	3.5	WATTS
MAXIMUM HEATER CATHODE VOLTAGE	$\pm$ 200	VOLTS
MAXIMUM ALTITUDE	10 000	FEET
MAXIMUM SHOCK	450	G

CONTINUED ON FOLLOWING PAGE

**TUNG-SOL**

CONTINUED FROM PRECEDING PAGE

**TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS**  
CLASS A<sub>1</sub> AMPLIFIER

SINGLE TUBE

	TRIODE*		PENTODE		
HEATER VOLTAGE	6.3	6.3	6.3	6.3	VOLTS
HEATER CURRENT	0.9	0.9	0.9	0.9	AMP.
PLATE VOLTAGE	250	250	300	350	VOLTS
GRID #2 VOLTAGE	---	250	200	250	VOLTS
GRID #1 VOLTAGE	-20	-14	-12.5	-18	VOLTS
PEAK AF GRID #1 VOLTAGE	20	14	12.5	18	VOLTS
ZERO SIGNAL PLATE CURRENT	40	72	48	54	mA
ZERO SIGNAL GRID #2 CURRENT	---	5	2.5	2.5	mA
MAXIMUM SIGNAL GRID #2 CURRENT	---	7.3	4.7	7.0	mA
TRANSCONDUCTANCE	4700	6000	5300	5200	μMHOS
PLATE RESISTANCE	1700	22 500	35 500	33 000	OHMS
AMPLIFICATION FACTOR	8	---	---	---	OHMS
LOAD RESISTANCE	5000	2500	4500	4200	OHMS
MAXIMUM SIGNAL POWER OUTPUT	1.4	6.5	6.5	10.8	WATTS
TOTAL HARMONIC DISTORTION (APPROX)	5	10	11	15	PERCENT
MAXIMUM SIGNAL PLATE CURRENT	44	73	55	66	mA

**PUSH-PULL AMPLIFIER**

VALUES FOR TWO TUBES

	CLASS A1		CLASS AB1		CLASS AB2		
HEATER VOLTAGE	6.3	6.3	6.3	6.3	6.3	6.3	VOLTS
HEATER CURRENT	0.9	0.9	0.9	0.9	0.9	0.9	AMP.
PLATE VOLTAGE	250	270	360	360	360	360	VOLTS
GRID #2 VOLTAGE	250	270	270	270	225	270	VOLTS
GRID #1 VOLTAGE	-16	-17.5	-22.5	-22.5	-18	-22.5	VOLTS
PEAK AF GRID TO GRID VOLTAGE	32	35	45	45	52	72	VOLTS
ZERO SIGNAL PLATE CURRENT	120	134	88	88	78	88	mA
MAX. SIGNAL PLATE CURRENT	140	155	132	140	142	205	mA
ZERO SIGNAL GRID #2 CURRENT	10	11	5	5	3.5	5	mA
MAX. SIGNAL GRID #2 CURRENT	16	17	15	11	11	16	mA
TRANSCONDUCTANCE (EA. TUBE)	5500	5700	---	---	---	---	μMHOS
PLATE RESISTANCE (EA. TUBE)	24500	23500	---	---	---	---	OHMS
LOAD RESISTANCE	5000	5000	6600	3800	6000	3800	OHMS
POWER OUTPUT	14.5	17.5	26.5	18	31	47	WATTS
TOTAL HARMONIC DISTORTION	2	2	2	2	2	2	PERCENT

**CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN**

$E_f = 6.3V$ ,  $E_b = 250Vdc$ ,  $E_{c2} = 250Vdc$ ,  $E_{c1} = -14Vdc$

EXCEPT AS MODIFIED BELOW

	INITIAL		500 HOUR LIFE TEST				
	INDIVIDUAL MIN.	PROD. MAX.	INDIVIDUAL MIN.	PROD. MAX.	INDIVIDUAL MIN.	PROD. MAX.	
HEATER CURRENT	840	960	---	---	---	---	mA
HEATER CATHODE LEAKAGE	0.	75	---	---	---	---	μAdc
GRID #1 CURRENT ( $E_b = 400Vdc$ , $E_{c2} = 300Vdc$ , $E_{c1} = -19Vdc$ )	0	-3.0	---	---	---	---	μAdc
PLATE CURRENT ( $E_b = 400Vdc$ , $E_{c2} = 300Vdc$ , $E_{c1} = -22Vdc$ )	50	80	---	---	---	---	mA
SCREEN GRID CURRENT ( $E_b = 400Vdc$ , $E_{c2} = 300Vdc$ , $E_{c1} = -22Vdc$ )	0	5.0	---	---	---	---	mA

CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN -- CONT'D.

$E_f = 6.3V$ ,  $E_b = 250Vdc$ ,  $E_{c2} = 250Vdc$ ,  $E_{c1} = -14Vdc$   
EXCEPT AS MODIFIED BELOW

TRANSCONDUCTANCE	5200	6800	---	---	---	---	$\mu$ MHOS
POWER OUTPUT ( $E_{sig} = 9.8 V_{ac}$ , $R_p = 2500 OHMS$ )	5.4	---	---	---	---	---	WATTS
GRID EMISSION ( $E_b = E_{c1} = E_{c2} = 50Vdc$ )	275	---	---	---	---	---	mAdc

SPECIAL REQUIREMENTS

VARIABLE FREQUENCY VIBRATION <sup>A</sup> ( $R_p = 2000 OHMS$ , $E_{c1} = -27Vdc$ )	---	---	---	---	1000	mVac
LOW FREQUENCY VIBRATION <sup>B</sup> ( $R_p = 2000 OHMS$ , $E_{c1} = -27Vdc$ )	---	---	---	---	1000	mVac
SHOCK <sup>C</sup> (HAMMER ANGLE = $30^\circ$ , $E_f = -6.3V$ )	---	---	---	---	---	---
VIBRATIONAL FATIGUE <sup>D</sup>	---	---	---	---	---	---
POST SHOCK AND VIBRATIONAL FATIGUE TEST END POINTS	---	---	---	---	---	---
LOW FREQUENCY VIBRATION	---	---	---	---	1000	Vac
HEATER CATHODE LEAKAGE	---	---	---	---	0	$\mu$ Adc
TRANSCONDUCTANCE	---	---	---	---	4500	$\mu$ MHOS
MECHANICAL RESONANCE <sup>E</sup>	---	---	---	---	---	---
AF NOISE <sup>F</sup> ( $E_{sig} = 280mVac$ , $R_p = 2000 OHMS$ )	---	---	---	---	17	VU
LIFE TEST END POINT	---	---	---	---	---	---
POWER OUTPUT	---	---	---	---	4.0	WATTS
TRANSCONDUCTANCE	---	---	---	---	4500	$\mu$ MHOS

NOTES

\* GRID #2 CONNECTED TO PLATE

<sup>A</sup> SEE MIL-E-1C 4.9.20.3

<sup>B</sup> SEE MIL-E-1C 4.9.20.4

<sup>C</sup> SEE MIL-E-1C 4.9.20.5



<sup>D</sup> SEE MIL-E-1C 4.9.20.6



<sup>E</sup> THE MOUNT SHALL SHOW NO PRONOUNCED MECHANICAL RESONANCE BELOW 100 CPS.

<sup>F</sup> SEE MIL-E-1C 4.10.3.2

PRINTED IN U. S. A.

**6L6WGB**  
PREMIUM TUBE

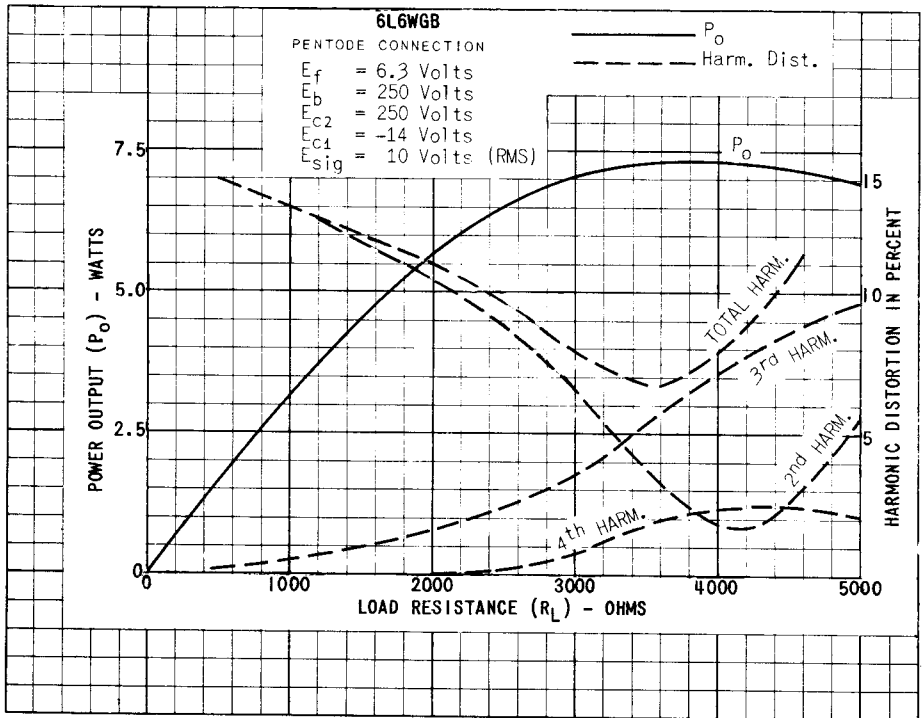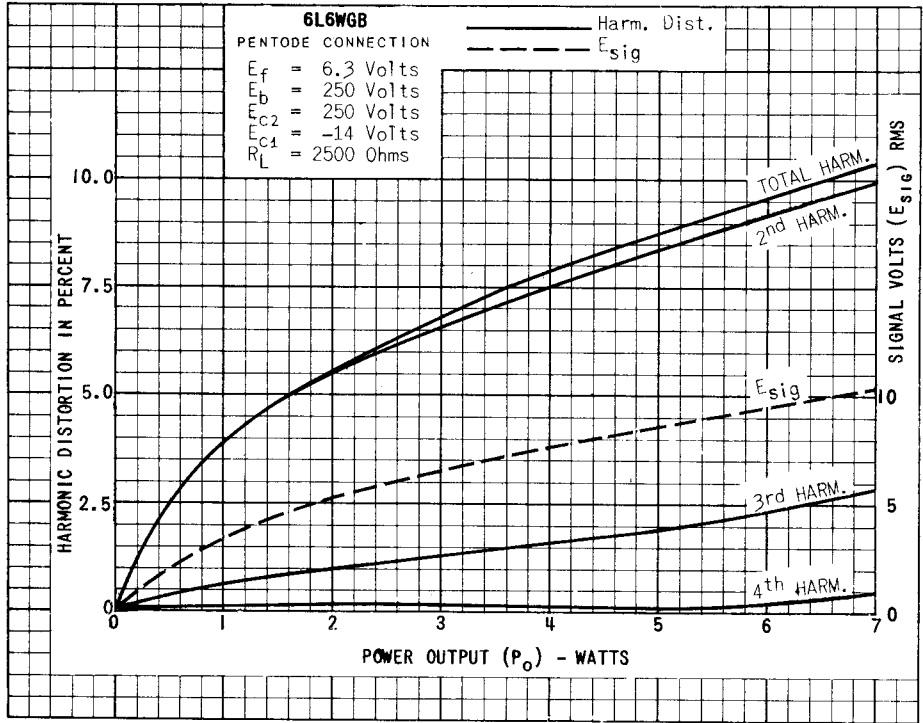

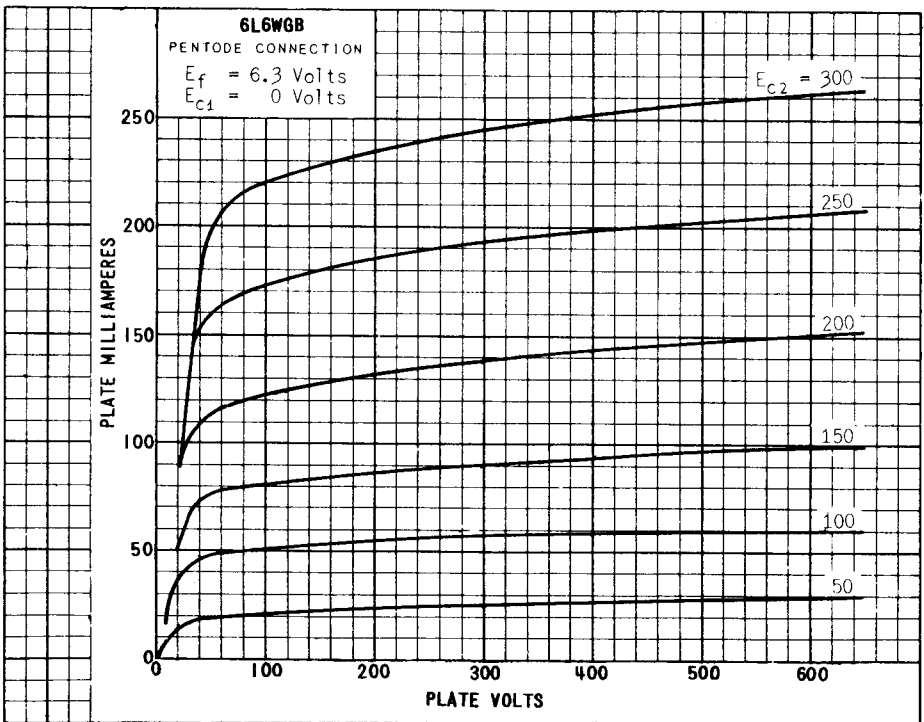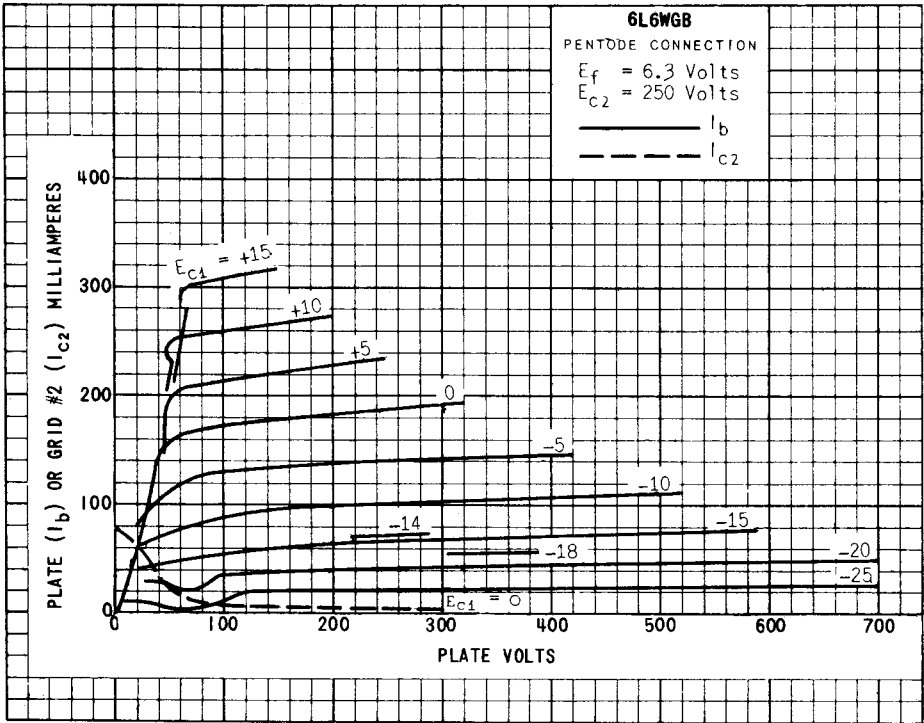

PRINTED IN U. S. A.

6L6WGB  
PREMIUM TUBE

