



T.	Image	Image	$I_f$		Cl.	$U_a$	$U_g$	$I_a$	$I_g$	$U_{g \approx}$	$P_{dr}$	$R_g$	$R_{g/a}$	$P_o$	$P_a$	
			V	A												k $\Omega$
8003	amer	1	10	3,25	C-Tgr	1350	-175	245	35	320	11	5		250	100	
						1350	-400	250	50	maximum (f = 30 MHz)						
						1100	-260	200	40	430	15	6,5	167			
						1100	-400	200	50	maximum						
8003					B-Tlf	1350	-110	110	1,5	135	8		50	100		
						1350	-100	150		240 x 2	5,25 x 2	6	460	100		
					B( $\approx$ ) Modul.	1350		250		maximum						

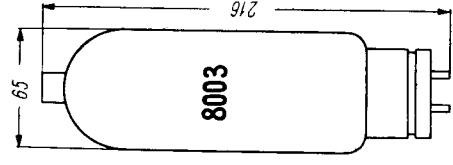

$C_g$	$C_a$	$C_{g/a}$
pF	pF	pF
5,8	3,4	11,7



8003