

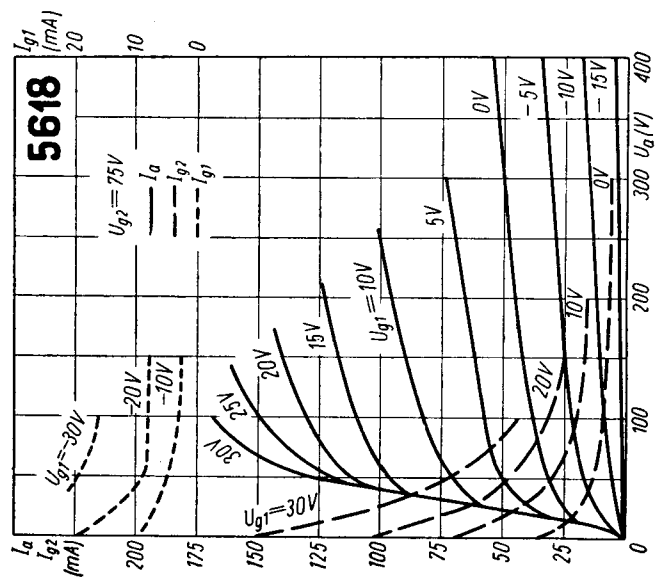


T.			U_f V	I_f A	Cl.	f MHz	U_a V	U_{g2} V	U_{g3} V	U_{g1} V	I_a mA	I_{g2} mA	I_{g1} mA	$U_{g1} \approx$ V	P_{dr} W	P_o W	P_{g2} W	P_a W			
5618	RCA	1	3/6	0,46/0,23	C-Tgr	$\left\{ \begin{array}{l} <40 \\ <80 \end{array} \right.$ $\left\{ \begin{array}{l} 40/80 \\ 26/78 \end{array} \right.$ $\left\{ \begin{array}{l} \text{(Fig. 1)} \\ \text{(Fig. 2)} \end{array} \right.$	300	75	0	45	25	7	1,5	65	0,2	5,4					
							300	75	0	45	25	7	1,5	65	0,3	5,2					
							300	125	0	125	30	3	3	maximum	2	5					
5618	RCA	1	3/6	0,46/0,23	$\left\{ \begin{array}{l} f \times 2 \\ f \times 3 \end{array} \right.$ $\left\{ \begin{array}{l} A1(\approx) \\ \text{Modul} \end{array} \right.$	$\left\{ \begin{array}{l} 40/80 \\ 26/78 \end{array} \right.$ $\left\{ \begin{array}{l} \text{(Fig. 1)} \\ \text{(Fig. 2)} \end{array} \right.$	300	75	0	125	25	5,5	1,85	160	0,75	4,2					
							300	75	0	125	25	5,5	1,85	160	0,75	3,4					
							300	125	0	125	30	3	3	maximum	2	5					
5618	RCA	1	3/6	0,46/0,23	$\left\{ \begin{array}{l} A1(\approx) \\ \text{Modul} \end{array} \right.$	$\left\{ \begin{array}{l} \text{(Fig. 1)} \\ \text{(Fig. 2)} \end{array} \right.$	250	75	0	8	16 ÷ 17,5	1,5 ÷ 3,5	8	8	8	1,2					
							250	75	0	8	19 ÷ 20,5	2 ÷ 4,5	8	8	1,4						
							300	125	0	125	30	3	3	maximum	2	5					



C_{g1}	C_a	$C_{g1/a}$	vide * 5
pF	pF	pF	
7	5	0,24	

