

# TELEVISION TUBE

# MW43-80Z

Direct viewing television tube with 17-in. diagonal rectangular metal-backed grey-glass screen. This tube has magnetic focusing and 90° magnetic deflection.

This data should be read in conjunction with GENERAL OPERATIONAL RECOMMENDATIONS—CATHODE RAY TUBES

## HEATER

Suitable for series or parallel operation

$V_h$	6.3	V
$I_h$	300	mA

The limits of heater voltage and current are contained in 'General operational recommendations—cathode ray tubes'.

**Note** (applies to series operation only)—The surge heater voltage must not exceed 9.5V<sub>r.m.s.</sub> when the supply is switched on. When used in a series heater chain a current limiting device may be necessary in the circuit to ensure that this voltage is not exceeded.

## EXTERNAL CONDUCTIVE COATING

This tube has an external conductive coating, M, and the capacitance of this to the final anode may be used to provide smoothing for the e.h.t. supply. The tube marking and warning labels are on the side of the cone opposite the final anode connector and this side should not be used for making contact to the external conductive coating.

## CAPACITANCES

$C_{g-a11}$	< 8.0	pF
$C_{k-a11}$	< 5.0	pF
$C_{k+a2-a11}$	< 11	pF
$C_{a3-M}$	1200	pF

## SCREEN

Metal backed		
Fluorescent colour	white	
Light transmission	70	%
Useful screen area	see drawing on page D4	

## FOCUSING

Magnetic

## DEFLECTION

Double magnetic

For timebase designs the following spreads in the useful screen area should be considered.

Picture height		
Maximum	284	mm
Minimum	273	mm
Picture width		
Maximum	369	mm
Minimum	362	mm
Picture diagonal		
Maximum	400	mm
Minimum	390	mm

The spread in the cone length can be obtained from the outline drawing.

### ION TRAP

This tube does not use an external ion trap magnet. When used as a replacement for ion trap types, the ion trap magnet and any lead connected to it should be discarded.

### REFERENCE LINE GAUGE

See 'General operational recommendations—cathode ray tubes'.

### MOUNTING POSITION

Any

The tube socket should not be rigidly mounted but should have flexible leads and be allowed to move freely. The bottom circumference of the base shell will fall within a circle having a diameter of 55mm which is centred upon the perpendicular from the centre of the face.

### PREFOCUSING

The spot size and uniformity of focus depend upon  $V_{a2}$ . At  $V_{a2}$  zero or negative with respect to cathode the spot size at the centre of the screen and the width of the electron beam are such that optimum uniformity of focus is obtained over the whole screen. If  $V_{a2}$  is increased, the spot size at the centre of the screen is reduced but the width of the electron beam is increased, resulting in inferior focus at the edges of the screen.

With increased  $V_{a2}$ , the power of the external focusing magnet has to be increased.

### OPERATING CONDITIONS

$V_{a1}$	14	kV
$V_{a2}$	0	V
$V_{u1}$	300	V
$V_g$ for visual extinction of focused raster	-40 to -86	V

## LIMITING VALUES (design centre ratings)

** $V_{a3}$ max.	16	kV
$V_{a3}$ min.	10	kV
$V_{a2}$ max.	410	V
$V_{a2}$ min.	-100	V
$V_{a1}$ max.	410	V
$V_{a1}$ min.	200	V
* $-V_g$ max.	150	V
† $V_{h-k}$		
Cathode positive		
d.c. max.	200	V
pk max.	300	V
Cathode negative		
d.c. max.	125	V
pk max.	250	V
$R_{h-k}$ max.	1.0	M $\Omega$
$Z_{k-e}$ max. (f = 50Hz)	100	k $\Omega$
$R_{g-k}$ max.	1.5	M $\Omega$
$Z_{g-k}$ max. (f = 50Hz)	500	k $\Omega$
Max. $a_1$ supply source impedance	1.5	M $\Omega$
Max. $a_2$ supply source impedance	1.5	M $\Omega$

\*The d.c. value of grid bias must not be allowed to become positive with respect to the cathode, except during the period immediately after switching the receiver on or off when it may be allowed to rise to  $+1V$ . The maximum positive grid excursion of the video signal may reach  $2V$  and at this voltage the grid current may be expected to be approximately  $2mA$ .

\*\*The product of  $V_{a3}$  and  $I_t$  (average value for the whole screen) must not exceed  $6W$ .

†In order to avoid excessive hum the a.c. component of  $V_{h-k}$  should be as low as possible ( $< 20V_{r.m.s.}$ ).

During a warming-up period not exceeding  $45s$   $V_{h-k(pk)}$  max. (cathode positive) is allowed to rise to  $410V$ .


## WEIGHT

Tube alone

}	6.4	kg
	14	lb

# MW43-80Z

## TELEVISION TUBE

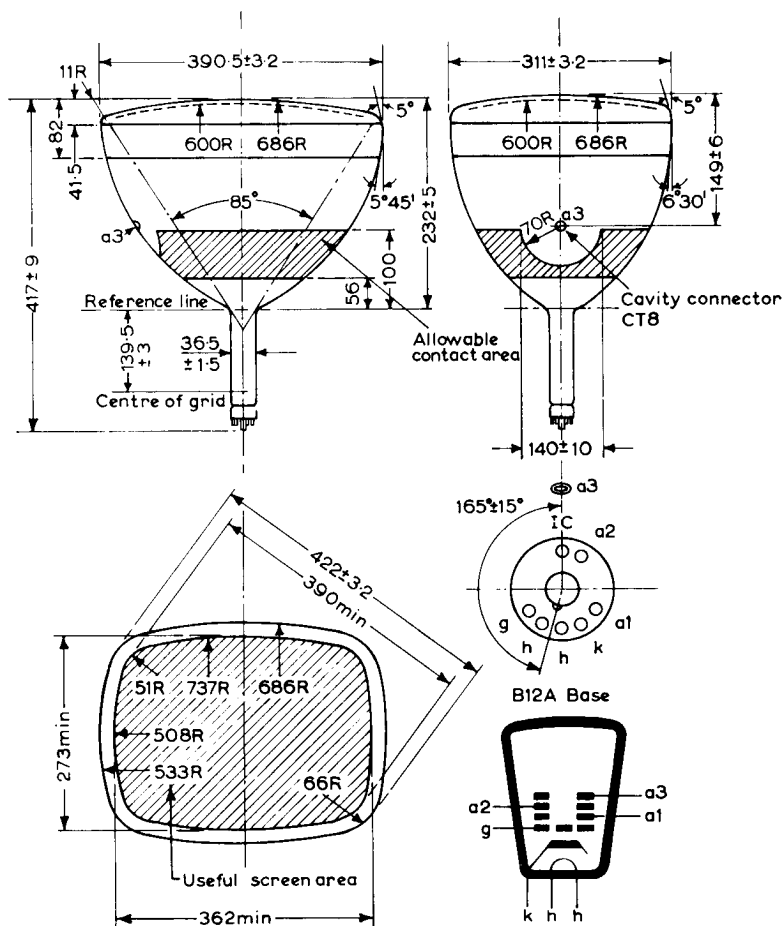

All dimensions in mm