



# Repeater Triode

3A/110A  
3A/110B

3A/110A

3A/110B

(3A/110A is for replacement purposes only)

## CATHODE.

Oxide-coated filament

Current	0.25	A
Nominal voltage	4.0	V

## RATING.

Amplification factor	} Measured at $V_a$ 130V $V_{g1}$ -4.5V, $I_f$ 0.25A D.C. }	12	ohms
Impedance			

## DIRECT INTER-ELECTRODE CAPACITIES.

Grid to anode	9.7	pF
Grid to filament	6.5	pF
Anode to filament	2.5	pF

## BASE.

3A/110A American 4-pin bayonet

3A/110B Standard 5-pin British

## DIMENSIONS.

Maximum overall length



3A/110A	116	mm.
3A/110B	118	mm.

Maximum bulb diameter

Net weight

## MAXIMUM RATINGS.

Maximum direct anode voltage	190	V
------------------------------	-----	---

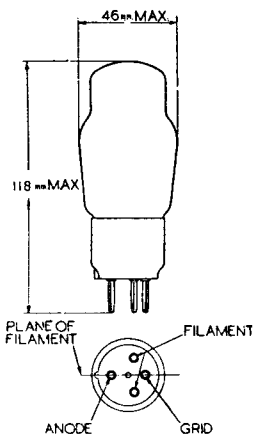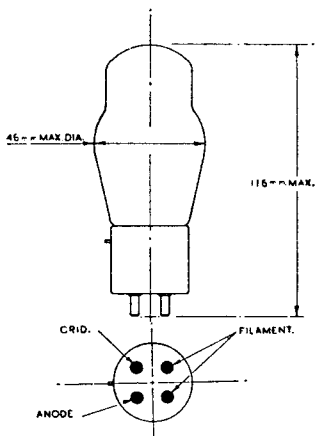

3A/110A  
3A/110B

# Repeater Triode



3A/110A

3A/110B

