

**EDISWAN**

ESU.206

## HIGH VACUUM HALF-WAVE RECTIFIER

ESU.206

RATING

Filament Voltage (volts)	$V_f$	11.5
Filament Current (amps)	$I_f$	5.0
Maximum Peak Inverse Voltage (volts)	P.I.V.	10,000
Maximum Mean Anode Current (mA)	$I_{a(av)max}$	100

DIMENSIONS

Maximum Overall Length (mm)	260
Maximum Diameter (mm)	102
Approximate Nett Weight (ozs)	9
Approximate Packed Weight (lbs)	5
Approximate Packed Export Weight (lbs)	5½


MOUNTING POSITION - Vertical

ESU.206

**EDISWAN**

ESU.206

HIGH VACUUM HALF-WAVE RECTIFIER

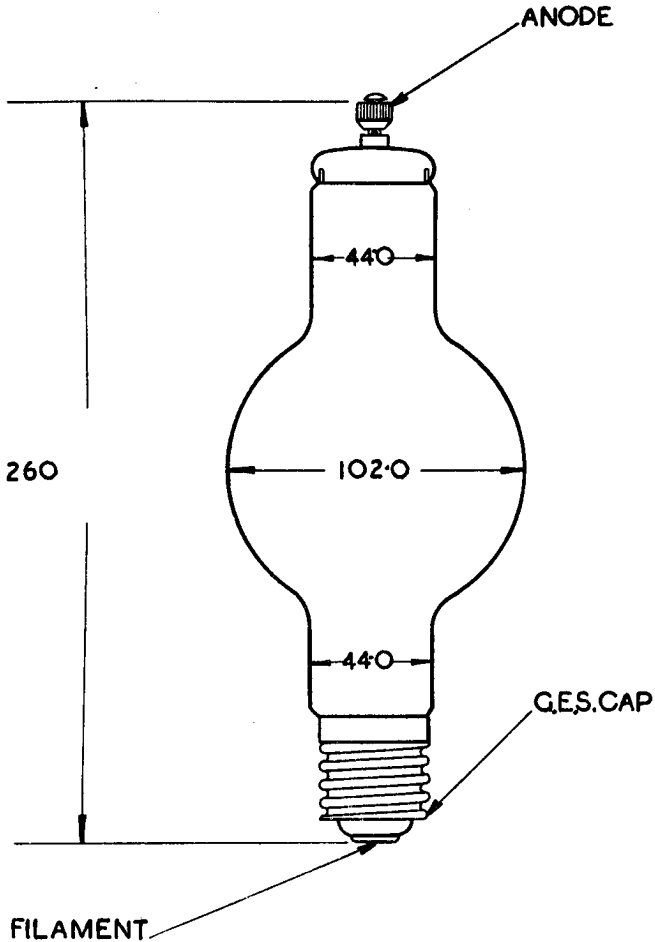

HARD GLASS BULB