

RADIO MANUFACTURERS ASSOCIATION ENGINEERING DEPARTMENT

RMA DATA BUREAU
90 West Street
New York 6, N. Y.

sponsor:
Amperex Electronic Corp.

Release No. 657


April 30, 1948

COUNTER TUBES

1B78, 1B79



	<u>1B78</u>	<u>1B79</u>
Filling	Argon + quenching admixture	Argon + quenching admixture
Operating Temperature Range	-70°C to +100°C	0°C to +100°C
Operating Voltage	1200 volts D.C.	1400 volts D.C.
Plateau	in excess of 300 volts	in excess of 500 volts
Slope of plateau	5% per 100 volts	10% per 100 volts
Capacity at terminals	2.4 mmf	2.4 mmf
Cosmic Ray Efficiency	greater than 80%	greater than 20%
Dead time	200 microseconds	200 microseconds
Background-unshielded	62 counts per minute	15 counts per minute
Life expectancy in counts	unlimited by use	greater than 10 ¹⁰ counts
Average Mica Window		
Thickness0005 in. = 3.5mg/cm ² = 12.70 microns	.0005 in. = 3.5mg/cm ² = 12.70 microns
Effective dia. of Mica Window	25/32"	25/32"
Cathode Material	Stainless Steel	Stainless Steel
Effective Cathode Dimensions	4" long x 3/8" O.D. x .047" wall	4" long x 3/8" O.D. x .047" wall

Mica windows 3.5mg/cm² thick will pass all beta radiation of energy in excess of 43 KEV. when the source is in close proximity to the window.

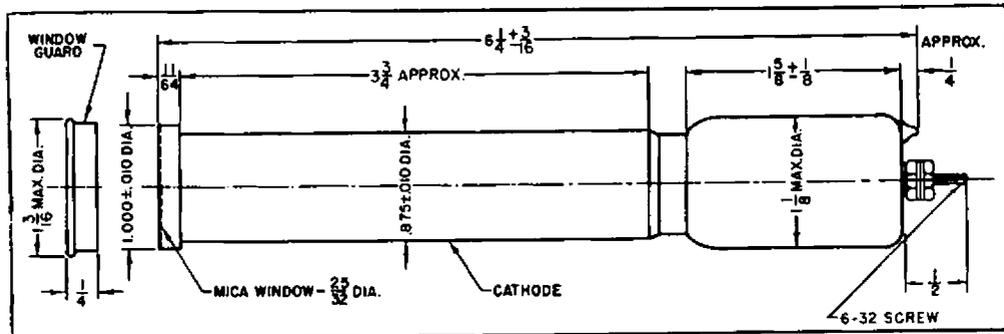

March 26th, 1949

<u>Tube Type</u>	<u>Item</u>	<u>As Registered</u>	<u>As Proposed</u>
1B69	Plateau Slope of Plateau Dead Time	in excess of 300 Volts 2% to 5% per 100 volts 200 microseconds	in excess of 200 volts 5% per 100 volts max. approx. 70 microseconds
1B73	Slope of Plateau Dead Time	2% to 5% per 100 volts 200 microseconds	5% per 100 volts max. approx. 100 microseconds
1B75	Oper. Temp. range Slope of Plateau	- 70°C to + 100°C 2% to 5% per 100 volts	- 55°C to +75°C 10% per 100 volts max.
1B76	Oper. Temp. range Operating Voltage Plateau Slope of Plateau	- 70°C to + 100°C 450 Volts D.C. in excess of 100 volts 5% per 100 Volts	- 55°C to + 75°C 700 Volts D.C. in excess of 200 volts 10% per 100 volts max.
1B77	Oper. Temp. range Slope of Plateau Dead time	- 70°C to + 100°C 2% to 5% per 100 volts 200 microseconds	- 55°C to + 75°C 10% per 100 volts max. approx. 320 microseconds
1B78	Oper. Temp Range Slope of Plateau Dead Time Outline drawing	- 70°C to + 100°C 5% per 100 volts 200 microseconds see attached sheet	- 55°C to + 75°C 10% per 100 volts max. approx 100 microseconds
1B80	Oper. Temp. range Operating voltage Plateau Slope of Plateau Dead time Outline drawing	- 70°C to + 100°C 450 volts D.C. in excess of 100 volts 5% per 100 volts 200 microseconds see attached sheet	- 55°C to + 75°C 700 Volts D.C. in excess of 200 volts 10% per 100 volts max. approx. 180 microseconds
1B81	Oper. Temp. Range Slope of Plateau	- 70°C to + 100°C 2% to 5% per 100 Volts	- 55°C to + 75°C 10% per 100 volts max.

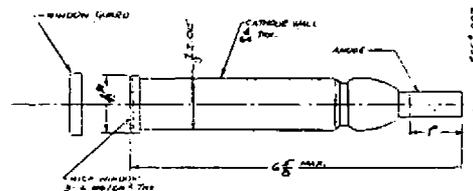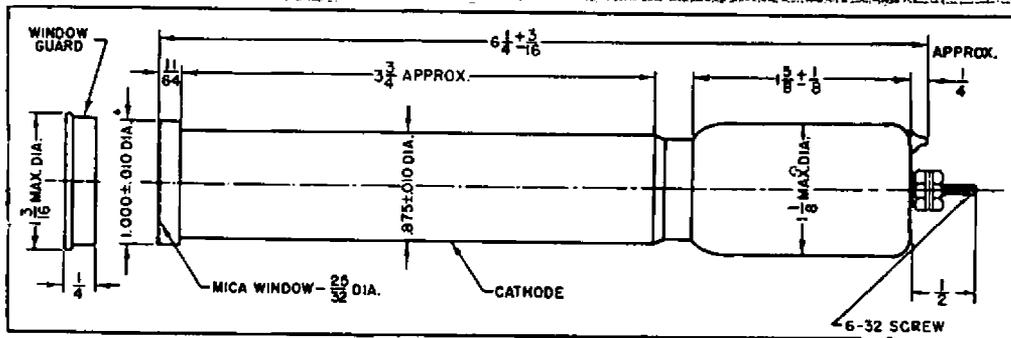

(NEW)

(1B78, 1B80)