

## TWIN PANEL TELEVISION PICTURE TUBE TYPE 23BP4

110° Magnetic Deflection  
 Rectangular Glass  
 Aluminized  
 Gray Filter Glass

Twin Face Panel, Integral Safety Glass  
 Electrostatic Focus  
 Extremely Short Neck Length

External Conductive Coating  
 Spherical Faceplate  
 No Ion Trap  
 19-5/16" × 15-1/4" Screen Size

### GENERAL:

Deflection Method . . . . . Magnetic  
 Focusing Method . . . . . Electrostatic  
 Deflection Angles (approx.)  
 Diagonal . . . . . 110°  
 Horizontal . . . . . 99°  
 Vertical . . . . . 82°  
 Screen  
 Phosphor . . . . . Aluminized P4  
 Fluorescence . . . . . White  
 Persistence . . . . . Short  
 Faceplate . . . . . Spherical Gray Filter Glass  
 Laminated Panel . . . . . FP198A1  
 Light Transmission (approx.) . . . . . 40%  
 Weight . . . . . 31 Pounds

### ELECTRICAL:

Heater  
 Voltage . . . . . 6.3 Volts  
 Current . . . . . 0.6 Ampere  
 Warm-up Time□ . . . . . 11 Seconds  
 Direct Interelectrode Capacitances:  
 Grid 1 to all other electrodes . . . . . 6 μμf  
 Cathode to all other electrodes . . . . . 5 μμf  
 External Conductive Coating  
 Maximum . . . . . 2500 μμf  
 Minimum . . . . . 2000 μμf

### MECHANICAL:

Mounting Position . . . . . Any  
 Screen Dimensions  
 Screen Area . . . . . 282 sq. in. Min.  
 Height . . . . . 15-1/4" Min.  
 Width . . . . . 19-5/16" Min.  
 Diagonal . . . . . 22-5/16" Min.  
 Bulb Dimensions  
 Bulb . . . . . J187A1  
 Height . . . . . 17-5/16" + 1/8" - 1/16"  
 Width . . . . . 21-5/16" + 1/8" - 1/16"  
 Diagonal . . . . . 24-45/64" + 3/32" - 1/16"  
 Overall Length . . . . . 14-7/16" ± 3/8"  
 Neck Length . . . . . 4-3/8" ± 1/8"  
 Anode Terminal . . . . . Recessed Small Cavity Cap (JEDEC J1-21)  
 Base . . . . . Small Button 7-Pin (JEDEC B7-208)  
 Basing . . . . . 8HR

### MAXIMUM RATINGS:

Design Center Values  
 Anode Voltage♠ . . . . . 20000 max. Volts  
 Grid 4 Voltage  
 Positive Value . . . . . 1000 max. Volts  
 Negative Value . . . . . 500 max. Volts  
 Grid 2 Voltage . . . . . 500 max. Volts  
 Grid 1 Voltage  
 Negative Peak Value . . . . . 200 max. Volts  
 Negative Bias Value . . . . . 140 max. Volts  
 Positive Bias Value . . . . . 0 max. Volts  
 Positive Peak Value . . . . . 0 max. Volts  
 Peak Heater-Cathode Voltage  
 Heater Negative with Respect to Cathode  
 During Warm-up Period of 15 Sec. Max. . . . . 410 max. Volts  
 After Equipment Warm-up Period . . . . . 180 max. Volts  
 Heater Positive with Respect to Cathode . . . . . 180 max. Volts

### TYPICAL GRID DRIVE OPERATING CONDITIONS:

Anode Voltage . . . . . 14000 Volts  
 Grid 4 Voltage . . . . . 0 to + 400 Volts  
 Grid 2 Voltage⊕ . . . . . 450 Volts  
 Grid 1 Voltage for Raster Cutoff . . . . . -45 to -105 Volts

### LIMITING CIRCUIT VALUES:


Grid 1 Circuit Resistance . . . . . 1.5 max. Megohms  
 Grid 2 Circuit Resistance▲ . . . . . 10000 min. Ohms  
 Grid 4 Circuit Resistance▲ . . . . . 10000 min. Ohms

♠ Brilliance and definition decrease with decreasing anode voltage. In general, anode voltage should not be less than 12,000 volts.

▲ Protective resistance in the G2 and G4 circuits is advisable to prevent damage to the tube.

⊕ It is recommended that not less than 300 volts on Grid 2 be used, as resolution is affected at lower voltages.

□ Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying 4 times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to 3 times rated heater voltage divided by rated heater current.

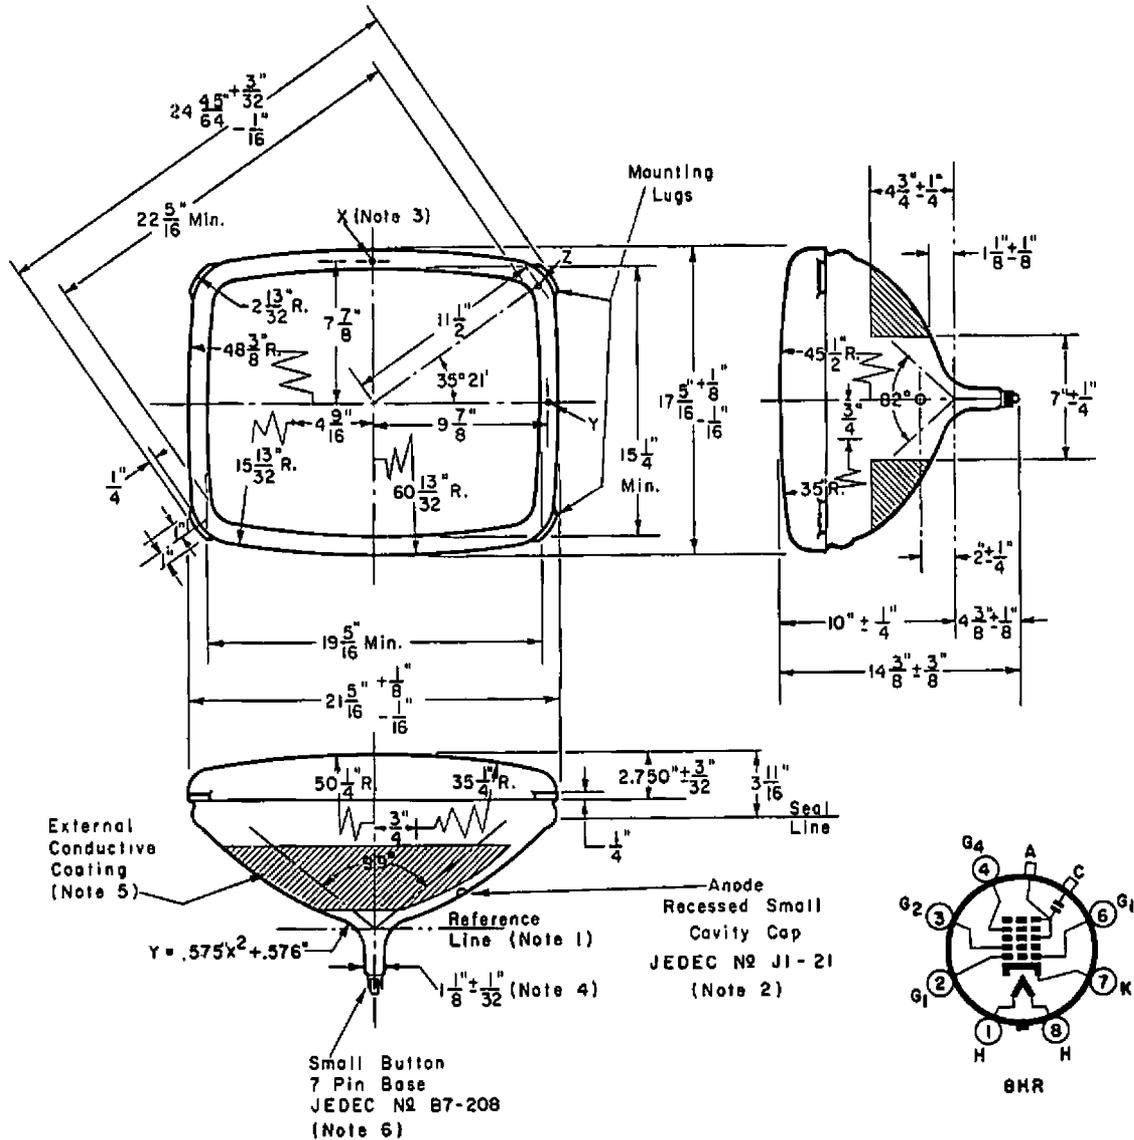

NOTE 1: With the tube neck inserted through the flared end of Reference Line Gauge JETEC No. 126 and with the tube seated in the gauge, the reference line is determined by the intersection of the plane face of the flared end of the gauge with the tube funnel. With a minimum neck length tube, the PM centering magnet (0 to 8 gauss) should extend no more than 2-1/8" from the yoke reference line.

NOTE 2: Base pin 4 aligns with major axis within 30° and is on same side as anode terminal.

NOTE 3: Planes perpendicular to the axis and passing through points X, Y and Z are determined as follows:

Plane tangent to crown of face, to plane of X = 0.758" nom.

Plane of X to plane of Y = 0.463 ± 0.030".

Plane of X to plane of Z = 0.970 ± 0.030".

NOTE 4: Neck diameter may be a maximum of 1.168" at the splice.

NOTE 5: External conductive coating forms supplementary filter capacitor and must be grounded.

NOTE 6: The socket should not be mounted rigidly, but should be allowed to move freely and have flexible leads. The associated wiring should not impress lateral strains on the base pins. The bottom circumference of the base wafer will lie within a circle concentric with the bulb axis and having a diameter of 1-3/4".