

High-vacuum HALF-WAVE RECTIFIER
 REDRESSEUR MONOPLAQUE à vide poussé
 Hochvakuum EINWEGGLEICHRICHTERRÖHRE

Heating : indirect by A.C. or D.C.
 series supply


Chauffage: indirect par C.A. ou C.C.
 alimentation série

Heizung : indirect durch Wechsel-
 oder Gleichstrom; Serien-
 speisung

$V_f = 31 \text{ V}$

$I_f = 100 \text{ mA}$

Dimensions in mm
 Dimensions en mm
 Abmessungen in mm



Base, culot, Sockel: Noval

Operating characteristics
 Caractéristiques d'utilisation
 Betriebsdaten


V_1	=	110	127	220	250	V_{eff}
I_o	=	100	100	100	100	mA
C_{filt}	=	50	50	50	50	μF
R_t	=	0	0	160	210	Ω
V_o	=	113	135	188	205	V

Limiting values
 Caractéristiques limites
 Grenzdaten

V_{invp}	=	max. 700 V				
I_o	=	max. 100 mA				
I_{ap}	=	max. 600 mA				
V_{kfp} (k pos., f neg.)	=	max. 550 V				
V_1	=	110	127	220	250	V_{eff}
R_t	=	min. 0	0	160	210	Ω

PHILIPS

UY 89

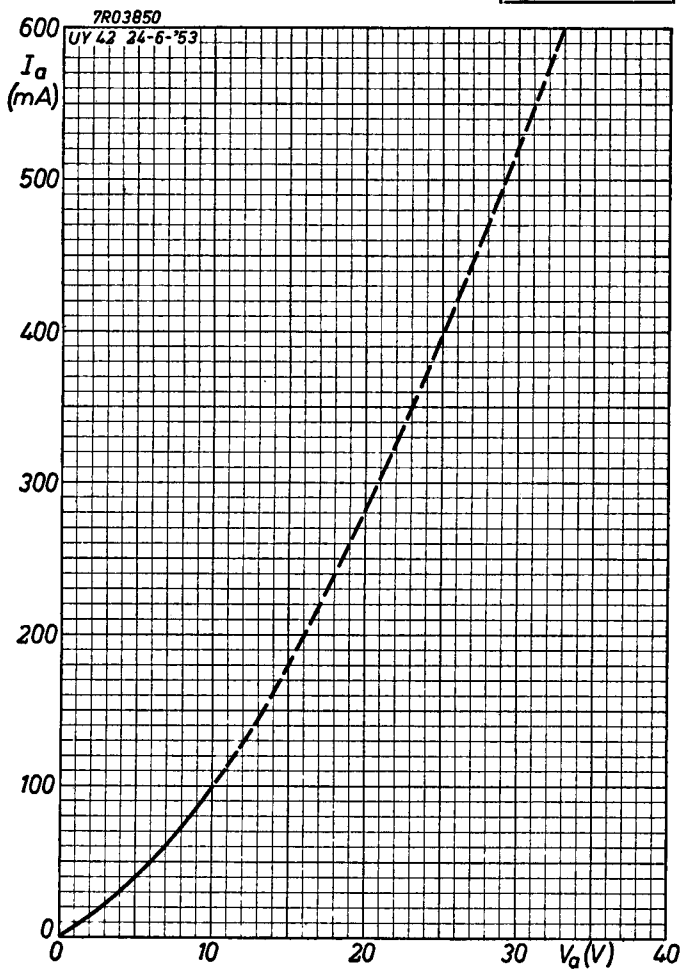

1.1.1960


A

UY 89

PHILIPS

7R03851

UY 42 24-6-'53

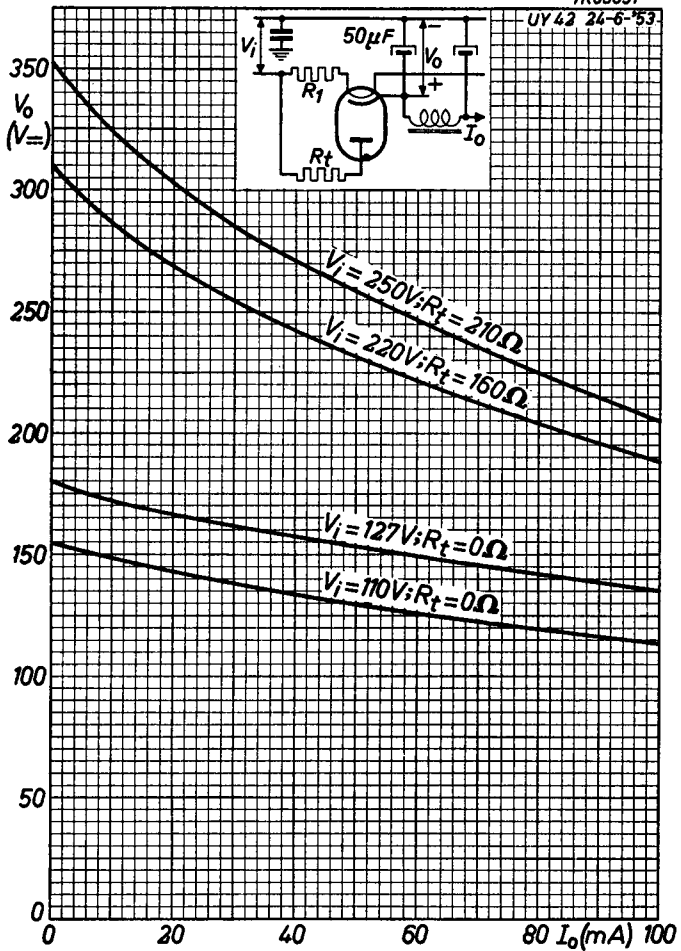

PHILIPS



*Electronic
Tube*

HANDBOOK

page	UY89 sheet	date
1	1	1960.01.01
2	A	1960.01.01
3	B	1960.01.01
4	FP	2000.07.09