

# TRIODE

# TY5-500

*Application:* R.F. industrial heating.  
*Power output:* 1.6kW continuous rating.  
*Frequency:* 50Mc/s at full rating.  
*Construction:* Glass; radiation cooled anode.

---

## PRELIMINARY DATA

This data should be read in conjunction with GENERAL OPERATIONAL RECOMMENDATIONS—TRANSMITTING VALVES preceding this section of the handbook.

### FILAMENT Thoriated tungsten

* $V_f$	5.0	V
$I_f$	32.5	A

\*The filament has been designed to accept temporary fluctuations  $+5\%$   
 $-10\%$

### MOUNTING POSITION

Vertical only, base down

### CAPACITANCES

$C_{a-g}$	5.1	pF
$C_{g-f}$	9.2	pF
$C_{a-f}$	0.2	pF

### CHARACTERISTICS (measured at $V_a = 4kV$ , $I_a = 120mA$ )

$g_m$	3.3	mA/V
$g_m$ (at $V_a = 1.0kV$ , $I_a = 2.3A$ )	10	mA/V
$\mu$	21	

### COOLING

Normally	Low velocity air flow
*At reduced input or with intermittent ratings	Natural
$T_{seals}$ max.	220 °C
$T_{bulb}$ max.	350 °C

\*See examples in typical data.

### ACCESSORIES

Socket	B8.700.51
Anode clip	40626

### CLASS 'C' OSCILLATOR

*With d.c. anode supply*

### LIMITING VALUES (absolute ratings)

f max.			50	Mc/s
V <sub>a</sub> max.			5.0	kV
V <sub>g</sub> max.			-1.25	kV
R <sub>g-f</sub> max.			15	kΩ
Duty factor max.	1	0.5	0.2	
Averaging time max.	—	10	5.0	s
p <sub>a</sub> max.	500	700	1000	W
I <sub>a</sub> max.	560	780	1100	mA
p <sub>g</sub> max.	85	95	110	W
I <sub>g</sub> max. (at p <sub>a</sub> max.)	210	290	420	mA

### OPERATING CONDITIONS

Cooling	Additional	Natural		Mc/s
		≦ 50	≦ 50	
f	≦ 50	≦ 50	≦ 50	
Duty factor	1	0.5	0.2	
t <sub>on</sub>	—	5.0	1.0	s
t <sub>off</sub>	—	5.0	4.0	s
V <sub>a</sub>	4.0	4.0	4.0	kV
I <sub>a</sub>	490	650	825	mA
I <sub>g</sub>	140	190	240	mA
P <sub>a</sub>	450	630	900	W
η <sub>a</sub>	77	76	73	%
R <sub>g-f</sub>	2.7	2.0	1.7	kΩ
R <sub>a</sub>	4.7	3.4	2.7	kΩ
Feedback ratio $\frac{V_{in(pk)}}{V_a(pk)}$	0.2	0.22	0.24	
P <sub>out</sub>	1.5	2.0	2.4	kW
*P <sub>load</sub>	1.2	1.6	1.9	kW

\*0.85 (P<sub>out</sub>-P<sub>drive</sub>)

## CLASS 'C' OSCILLATOR

*Anode supply single phase, full wave rectifier without smoothing filter.*

### LIMITING VALUES (absolute ratings)

f max.			50	Mc/s
V <sub>a</sub> max.			4.5	kV
V <sub>g</sub> max.			850	V
R <sub>g-f</sub> max.			15	kΩ
Duty factor max.	1.0	0.5	0.2	
Averaging time max.	—	10	5.0	s
p <sub>a</sub> max.	500	700	1000	W
I <sub>a</sub> max.	450	630	900	mA
p <sub>g</sub> max.	85	95	110	W
I <sub>g</sub> max. (at p <sub>a</sub> max.)	190	195	380	mA

### OPERATING CONDITIONS

Cooling	Additional	Natural		Mc/s
		≤ 50	≤ 50	
f	≤ 50	≤ 50	≤ 50	
Duty factor	1.0	0.5	0.2	
t <sub>on</sub>	—	5.0	1.0	s
t <sub>off</sub>	—	5.0	4.0	s
V <sub>tr(r.m.s.)</sub>	4.5	4.5	4.5	kV
V <sub>a</sub>	4.05	4.05	4.05	kV
I <sub>a</sub>	400	530	675	mA
I <sub>g</sub>	125	165	210	mA
p <sub>a</sub>	450	630	900	W
γ <sub>i<sub>a</sub></sub>	77	76	73	%
R <sub>g-f</sub>	2.7	2.2	1.7	kΩ
R <sub>a</sub>	5.9	4.3	3.5	kΩ
Feedback ratio $\frac{V_{in(pk)}}{V_a(pk)}$	0.16	0.17	0.18	
P <sub>out</sub>	1.53	2.0	2.46	kW
*P <sub>load</sub>	1.25	1.5	2.0	kW

\*0.85 (P<sub>out</sub> - P<sub>drive</sub>)

### CLASS 'C' OSCILLATOR

*Anode supply from three phase half-wave rectifier.*

### LIMITING VALUES (absolute ratings)

f max.			50	Mc/s
V <sub>a</sub> max.			5.0	kV
V <sub>g</sub> max.			-1.25	kV
R <sub>g-t</sub> max.			15	kΩ
Duty factor max.	1.0	0.5	0.2	
Averaging time max.	—	10	5.0	s
p <sub>a</sub> max.	500	700	1000	W
I <sub>a</sub> max.	560	780	1100	mA
p <sub>g</sub> max.	85	95	110	mA
I <sub>g</sub> max. (at p <sub>a</sub> max.)	210	290	420	mA

### OPERATING CONDITIONS

Cooling	Additional	Natural		Mc/s
		≤ 50	≤ 50	
f	≤ 50	≤ 50	≤ 50	
Duty factor	1	0.5	0.2	
t <sub>on</sub>	—	5.0	1.0	s
t <sub>off</sub>	—	5.0	4.0	s
V <sub>tr(r.m.s.)</sub>	3.4	3.4	3.4	kV
V <sub>a</sub>	4.0	4.0	4.0	kV
I <sub>a</sub>	480	640	820	mA
I <sub>g</sub>	140	190	240	mA
p <sub>a</sub>	450	630	900	W
η <sub>a</sub>	77	76	73	%
R <sub>g-t</sub>	2.7	2.0	1.7	kΩ
R <sub>a</sub>	4.7	3.4	2.7	kΩ
Feedback ratio $\frac{V_{in(pk)}}{V_a(pk)}$	0.2	0.22	0.24	
P <sub>out</sub>	1.5	2.0	2.4	kW
*P <sub>load</sub>	1.2	1.6	1.9	kW

\*0.85 (P<sub>load</sub> - P<sub>drive</sub>)

## CLASS 'C' OSCILLATOR

*Anode supply from transformer without intermediate rectifier.*

### LIMITING VALUES (absolute ratings)

f max.			50	Mc/s
$V_{tr(r.m.s.)}$ max.			5.0	kV
$V_g$ max.			-850	V
$R_{g-f}$ max.			15	k $\Omega$
Duty factor max.	1	0.5	0.2	
Averaging time max.	—	10	5.0	s
$p_a$ max.	500	700	1000	W
$I_a$ max.	320	450	640	mA
$p_g$ max.	85	95	110	W
$I_g$ max. (at $p_a$ max.)	110	155	220	mA




### OPERATING CONDITIONS

Cooling	Additional	Natural		Mc/s
		$\leq 50$	$\leq 50$	
f	$\leq 50$	$\leq 50$	$\leq 50$	Mc/s
Duty factor	1.0	0.5	0.2	
$t_{on}$	—	5.0	1.0	s
$t_{off}$	—	5.0	4.0	s
$V_{tr(r.m.s.)}$	4.5	4.5	4.5	kV
* $I_a$	280	420	600	mA
* $I_g$	80	120	170	mA
$p_a$	380	500	800	W
$\eta_a$	77	76	73	%
$R_{g-f}$	2.7	1.8	1.3	k $\Omega$
$R_a$	4.3	2.9	2.0	k $\Omega$
Feedback ratio $\frac{V_{in(pk)}}{V_a(pk)}$	0.18	0.22	0.25	
$P_{out}$	1.08	1.6	2.2	kW
** $P_{load}$	0.9	1.3	1.7	kW


\*Averaged over one cycle of supply frequency.

\*\*0.85 ( $P_{out} - P_{drive}$ )

5082

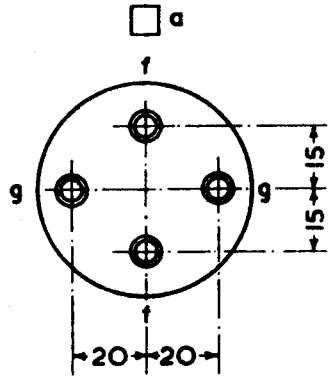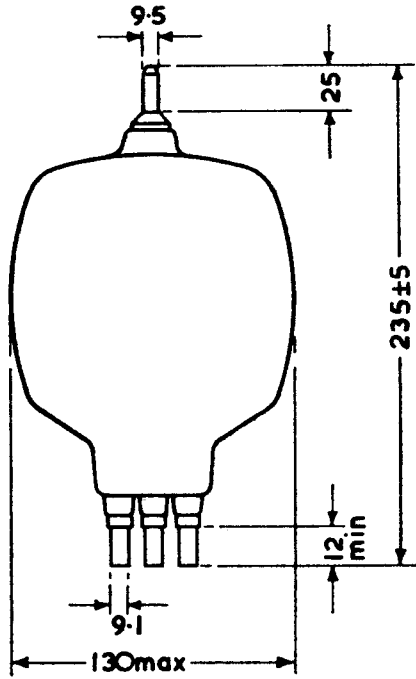

All dimensions in mm

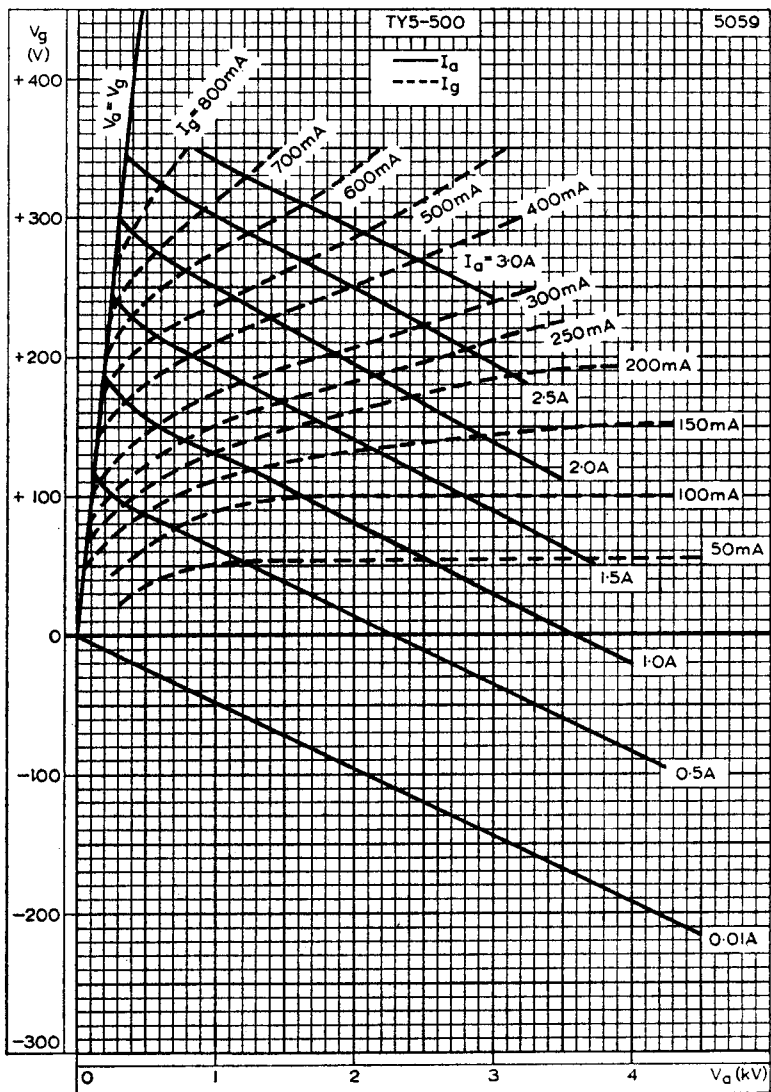

CONSTANT CURRENT CURVES

