

Mullard

TELEVISION DIODE

T4D

Heater

$V_f = 4.0 \text{ V}$

$I_f = 0.2 \text{ A}$

Capacity

$C_{dk} = 2.1 \text{ }\mu\text{F}$

Operating Conditions

$V_d \text{ max} \dots\dots\dots 50 \text{ V} \leftarrow$



$I_d \text{ max} \dots\dots\dots 5.0 \text{ mA} \leftarrow$

$V_d \text{ max} (I_d = +0.3 \text{ }\mu\text{A}) \dots\dots\dots -1.3 \text{ V}$

$V_{fk} \dots\dots\dots 50 \text{ V}$

$R_{fk} \dots\dots\dots 20,000 \text{ ohms}$

Arrangement of electrodes and base connections

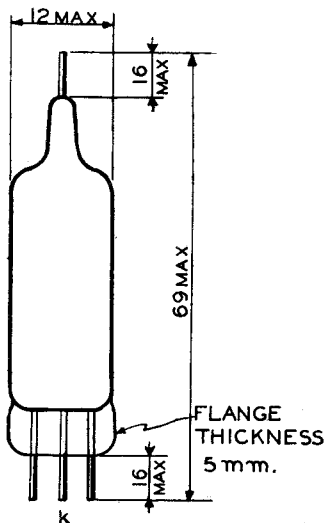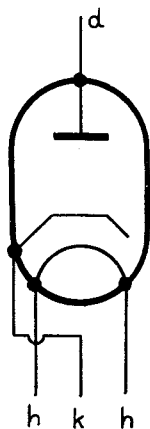

T 4 D

T4D

Mullard TELEVISION DIODE

