

NEW NATIONAL UNION ELECTRON TUBE DATA

N.U. 4C27

V.H.F. COAXIAL TRIODE

The National Union 4C27 is a coaxial triode designed particularly for use as a pulsed V.H.F. oscillator in the 200 mc. to 600 mc. range. Conservatively rated, one tube will deliver 50 kw peak power as a pulsed r.f. oscillator.

MAXIMUM RATINGS:-

Heater Voltage	6.0 ± 5%	Volts
Grid Voltage	-1000	Volts
Anode Voltage (Instantaneous)	8000	Volts
Anode Dissipation	150	Watts

ELECTRICAL RATINGS:

Cathode: Oxide coated unipotential		
Voltage	6.0 ± 5%	
Current	6.5	Amperes
Amplification Factor	23	

DIRECT INTERELECTRODE CAPACITANCES:

Grid to Plate	8	uuf.
Grid to Cathode	11	uuf.
Plate to Cathode	2.25	uuf.

MECHANICAL DATA:- (See Reverse)

MAXIMUM OVERALL DIMENSIONS

Length (less heater leads)	3	29/32	inches max.
Length (including heater leads)	5	7/8	inches max.
Width	2	1/4	inches
Radiator Diameter			
Radiator - Integral - See outline drawing			
Type of Cooling			
Air Blast			
Anode cooling fins	6		cfm
Grid seal and lead	1		cfm

TYPICAL OPERATING CONDITIONS:

CLASS C OSCILLATOR, PLATE PULSED

Frequency	215	megacycles
Anode Voltage (Instantaneous)	8000	Volts
Repetition Rate	400	pulses per second
Pulse Width	2	microseconds
Power Output	50	kw

OCTOBER 1, 1946


from RMA release #530, Oct. 21, 1946

See Over

Prepared by

Commercial Engineering Division

NEWARK NATIONAL UNION RADIO CORPORATION NEW JERSEY

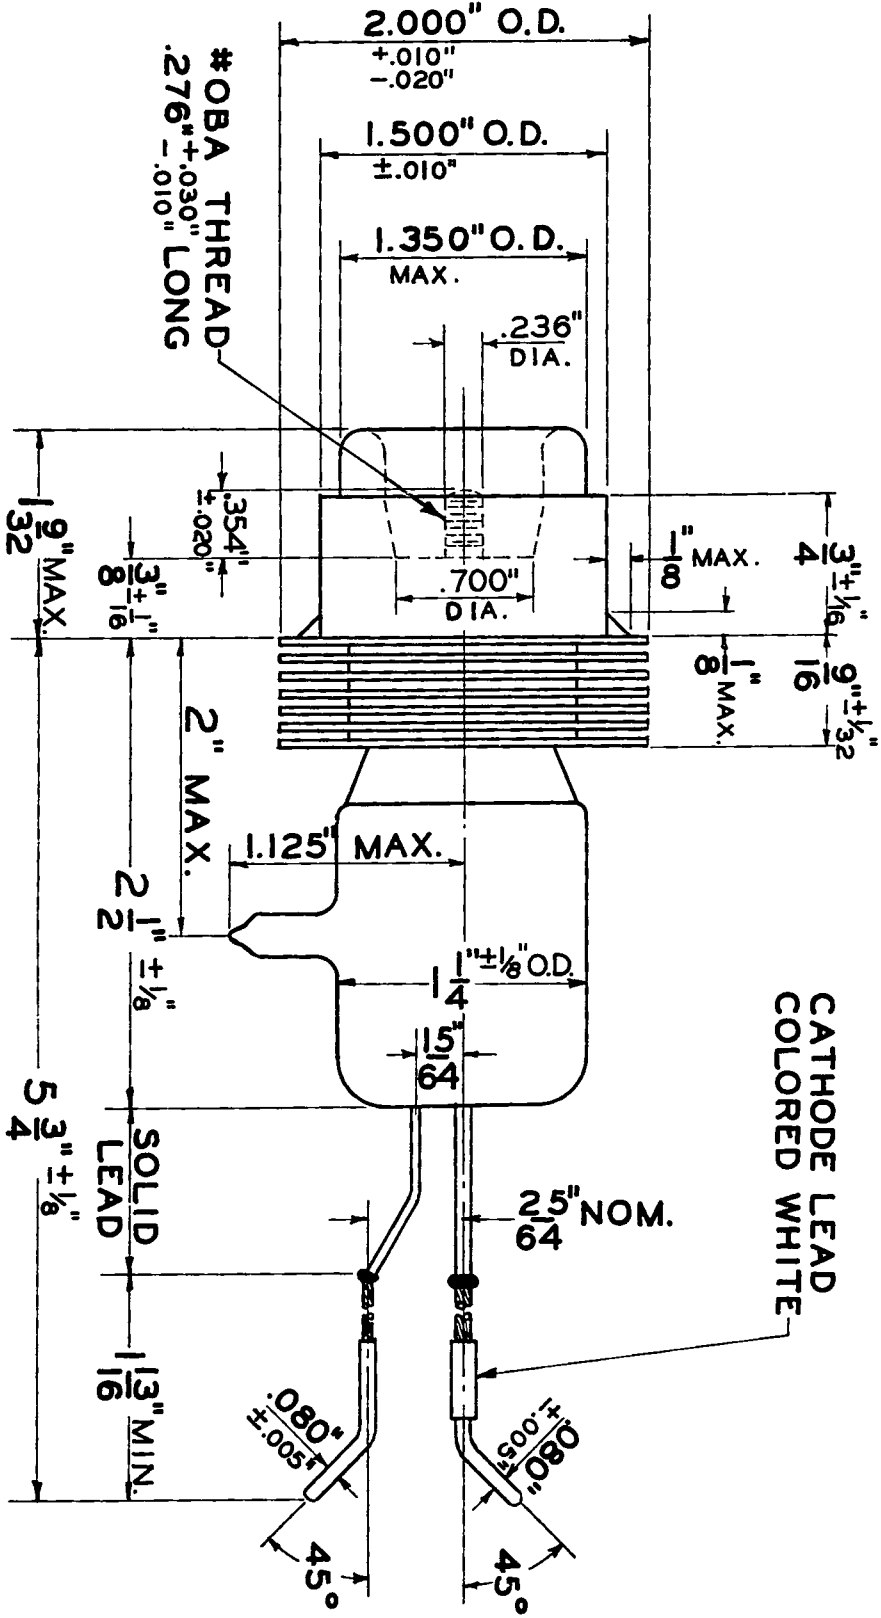

N.U. 4C27