

***DIGITRON – 10 Digit End-Viewing
Cold-Cathode Numerical Register Tube**

GR10H

Limit Ratings

Maximum cathode current	2.5 mA
Minimum voltage to ensure breakdown	150 V

Characteristics

Nominal running voltage at 2 mA	140 V
Minimum pre-bias voltage (glowing cathode at 0 V)	+25 V
Maximum pre-bias voltage (glowing cathode at 0 V)	+100 V

A cathode left floating will assume some potential between that of the anode and the glowing cathode. Pre-biasing ensures that the non-glowing electrodes are clamped at a predetermined level and cathodes are selected bringing them to the 0 V line.

Recommended Operating Conditions

Under the recommended operating conditions, with the cathodes switched sequentially every 24 hours, an average life of 4000 hours can be expected.

D.C. operation

Anode supply voltage— $R_a = 82 \text{ k}\Omega$	250 V
$R_a = 47 \text{ k}\Omega$	200 V

A.C. operation

(Unsmoothed half-wave rectified 50 c.p.s. A.C.)

Anode supply voltage— $R_a = 120 \text{ k}$	220-250 V r.m.s.
$R_a = 82 \text{ k}$	200-220 V r.m.s.

*Registered Trade Mark



GR10H


***DIGITRON—10 Digit End-Viewing
Cold-Cathode Numerical Register Tube**

Mechanical Data

Mounting position	Any
Base	B17A
Socket	B17A




Base Connections
(underside view)

CENTRE LINE OF CHARACTERS




- Pin 1 Cathode 3
- 2 Cathode 9
- 4 Cathode 0
- 5 Cathode 7
- 6 Cathode 8
- 10 Cathode 6
- 11 Cathode 5
- 12 Anode
- 13 Cathode 1
- 14 Cathode 2
- 15 Cathode 4

Note: All other pins are to be left unconnected.

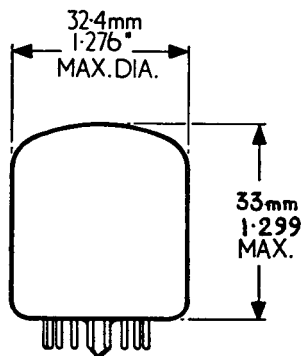

***DIGITRON – 10 Digit End-Viewing
Cold-Cathode Numerical Register Tube**

GR10H

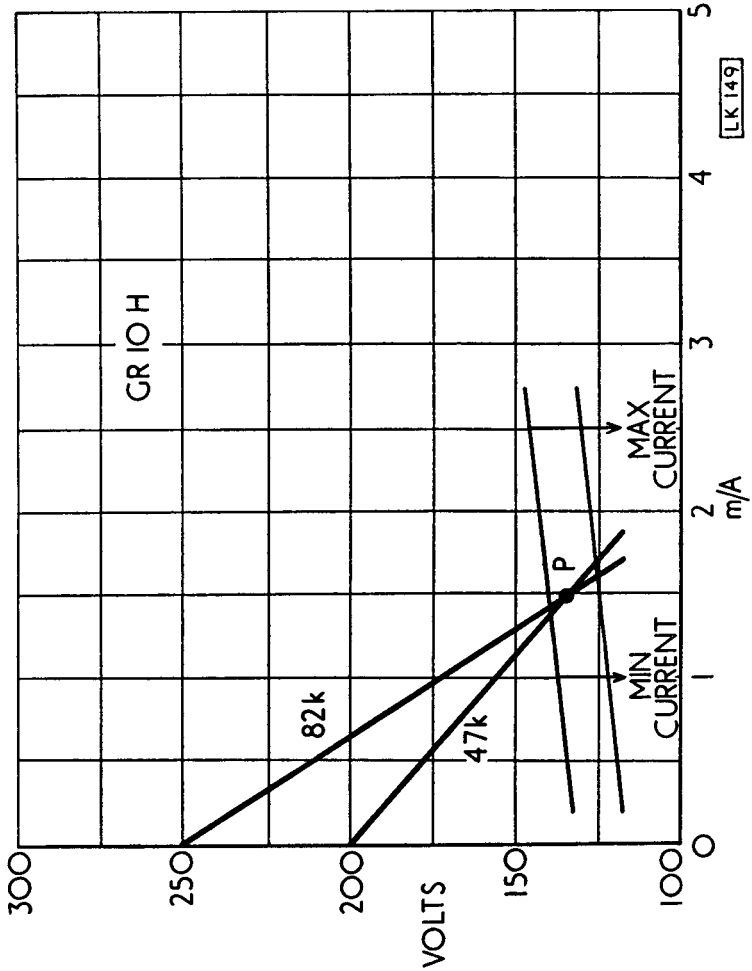

Operating Characteristics

*Registered Trade Mark



