

MAZDA

DLS15 & DLS16

VACUUM THERMAL DELAY SWITCHES

GENERAL

The DLS.15 and DLS.16 are designed for similar applications as the DLS.10 but are intended to fill the demand for a delay switch of reduced dimensions.

RATING

		DLS.15	DLS.16
Filament Voltage (volts)	V_f	4	6.3
Filament Current (amps)	I_f	.75	.48
Delay Time (secs)		min. 30 - max. 90	
Maximum Mean Current (Low Voltage Rating)	I_{pk}	5 amps @	240 v.
Maximum Mean Current (High Voltage Rating)	I_{pk}	100 m/a @	1,000 v.

DIMENSIONS

Maximum Overall Length (mm)	60	N.I.P. *
Maximum Diameter (mm)	60	32
Maximum Height (mm)	60	65

* Not Including Pins

MOUNTING POSITION - Unrestricted.

BASE

DLS.15	DLS.16
B.V.A. 4 pin	International Octal Base
Pin 1 - Fixed Contact	Pin 1 - -
Pin 2 - Moving Contact	Pin 2 - Filament
Pin 3 - Filament	Pin 3 - -
Pin 4 - Filament	Pin 4 - Moving Contact
	Pin 5 - -
	Pin 6 - Fixed Contact
	Pin 7 - -
	Pin 8 - Filament

IMPORTANT NOTE

To prevent any potential difference existing between the moving contact and heater, the two should be tied externally.


DLS15/16

MAZDA

DLS15 & DLS16

VACUUM THERMAL DELAY SWITCHES

DLS.15

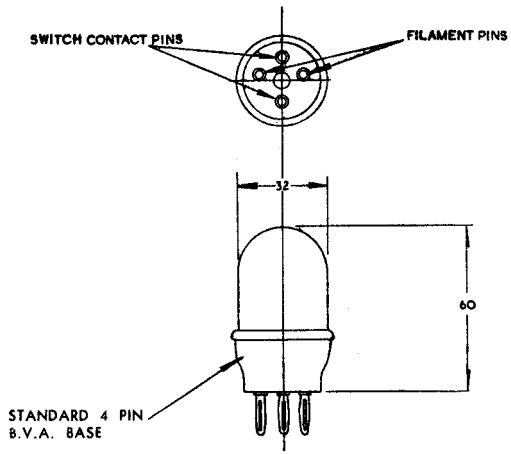

DLS.16

